



Pitch:1.27x2.54mm Box Headers For PCB

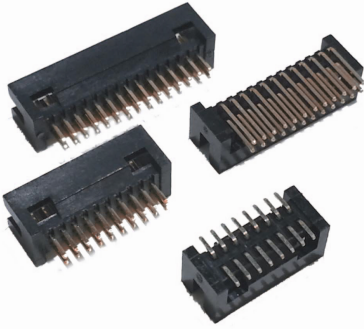





MATERIAL
 Insulator:Nylon UL94V-0 Black
 Contact:Copper Alloy

SPECIFICATIONS
 Current Rating:1A AC,DC
 Withstanding Voltage:500V AC/minute
 Insulation Resistance:5000MΩ Min.
 Temperature Range:-40°C~+105°C


POSITION	POSITION
8	44
10	50
20	60
26	68
30	80
34	100
40	

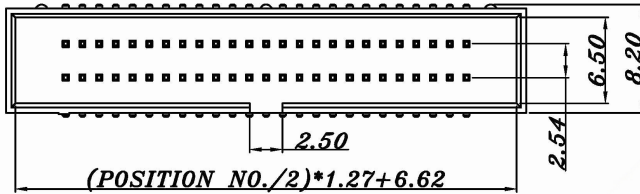

D327-20-S-A-G
 Series: D327-20
 Pins: 8-100
 Angle Type: S: Straight Type, R: Right Angle, M: SMD Type
 Contact Plated: G: Gold Flash
 Contact Material: A: Brass
 ◎Standard Packing: Tray

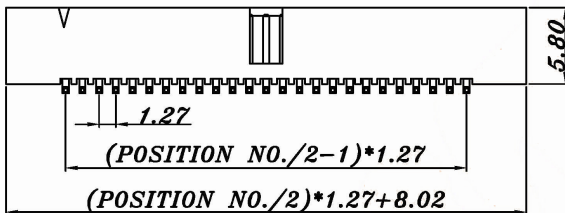


Pitch:1.27x1.27mm Box Headers For PCB

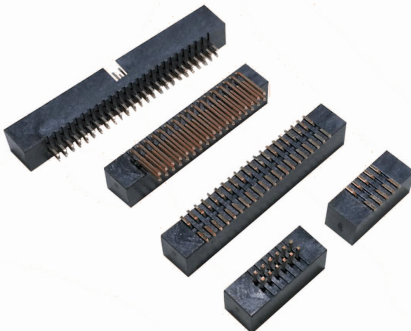

MATERIAL
 Insulator:LCP UL94V-0 Black
 Contact:Copper Alloy

SPECIFICATIONS
 Current Rating:1A AC,DC
 Withstanding Voltage:500V AC/minute
 Insulation Resistance:5000MΩ Min. at 500V DC.
 Temperature Range:-40°C~+105°C

POSITION	POSITION
10	34
12	40
14	44
16	50
20	60
24	64
26	68
28	80
30	100

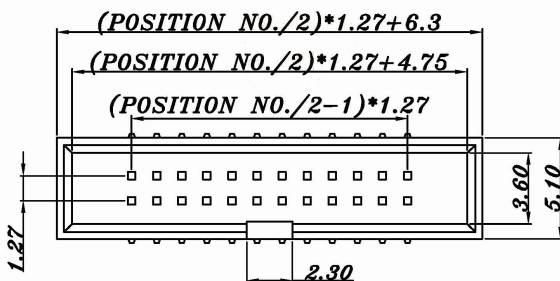

D327A-20-S-A-G
 Series: D327A-20
 Pins: 10-100
 Angle Type: S: Straight Type, R: Right Angle, M: SMD Type
 Contact Plated: G: Gold Flash
 Contact Material: A: Brass
 ◎Standard Packing: Tray

