


Pitch=0.8mm VHDCI CHAMP R/A TYPE

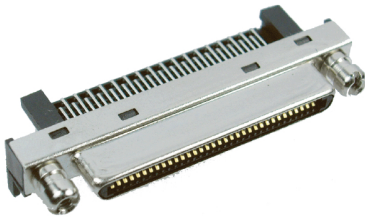

MATERIAL

Insulator: Thermoplastic UL94V-0

Contact: Copper Alloy

Shell: Steel

Boardlock: Copper Alloy

ELECTRICAL

Current Rating: 0.5 Amp.

Voltage Rating: 250 Vac Rms.

Operating Temperature: -55°C to 85°C

D205V-68S-1-N-S-T 

Pins
68S





Housing Color
1: Black

Shell Plated
N: Nickel

Standard Packing
Tray or Tube

Thread Type
T: M2.0

Contact Plated
S: Selective Gold
S1: 5u" Selective Gold

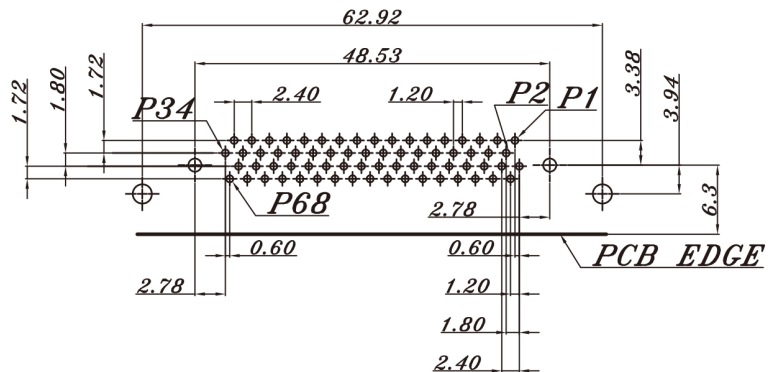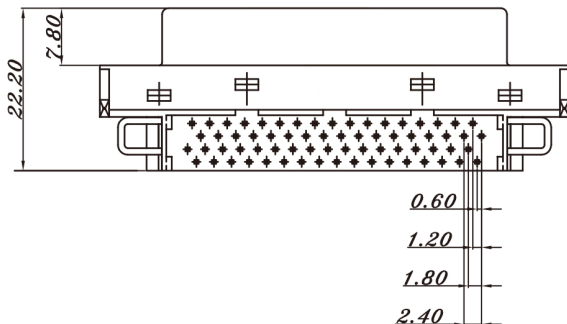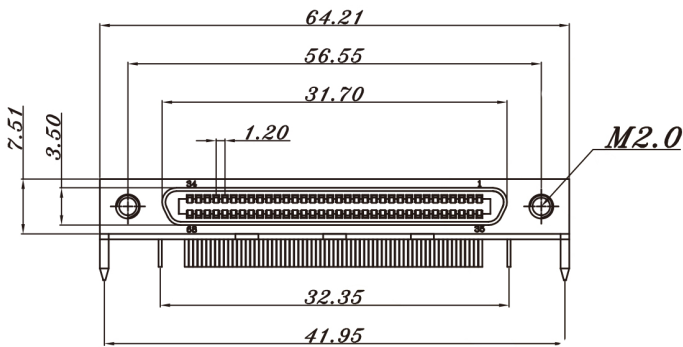

**P.C.B LAYOUT
TO SUGGEST**