


MINI DIN JACK CONNECTOR



MATERIAL

Insulator: Thermoplastic UL94V-0
Contact: Copper Alloy
Shield: Brass

ELECTRICAL

Current Rating: 1 Amp.
Voltage Rating: 500 Vac Rms.
Operating Temperature: -40°C to 105°C

D221-04-1-N-G-W 








Pins — 
03 04
05 06
07 08
09

Housing Color — 
1:Black
5:Green
A:Purple

Shell Plated — 
N:Nickel
T:Tin

 **Standard Packing Tray**
 **Springy Ground**
W:With
N:Without

 **Contact Plated**
G:Gold Flash
S:Selective Gold



MINI DIN JACK DUAL PORT CONNECTOR



MATERIAL

Insulator: Thermoplastic UL94V-0
Contact: Copper Alloy
Shield: Brass

ELECTRICAL

*Current Rating: 1 Amp.
Voltage Rating: 500 Vac Rms.
Operating Temperature: -40°C to 105°C*

D222-04-1-N-G-W 




Pins — 
03 04
05 06
07 08
09

Housing Color — 
1:Black
5:Green
A:Purple

Standard Packing Tray
Springy Ground
W: With
N: Without

Contact Plated
G: Gold Flash
S: Selective Gold

Shell Plated — 
N: Nickel
T: Tin

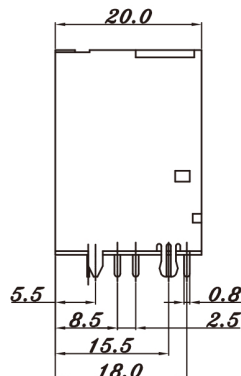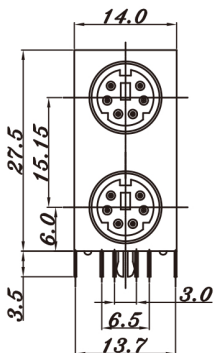

P.C.B LAYOUT
(BOTTOM VIEW)