

MINI DIN JACK VERTICAL TYPE



MATERIAL

Insulator: Thermoplastic UL94V-0
Contact: Copper Alloy
Shield: Brass

ELECTRICAL

Current Rating: 1 Amp.
Voltage Rating: 500 Vac Rms.
Operating Temperature: -40°C to 105°C

D224-04-1-N-G-W Standard Packing Tray





Pins
03 04
05 06
07 08
09

Housing Color
1: Black
5: Green
A: Purple


Shell Plated
N: Nickel
T: Tin

Springy Ground
W: With
N: Without

Contact Plated
G: Gold Flash
S: Selective Gold

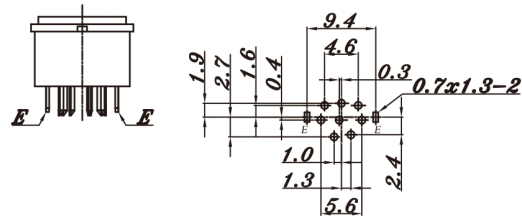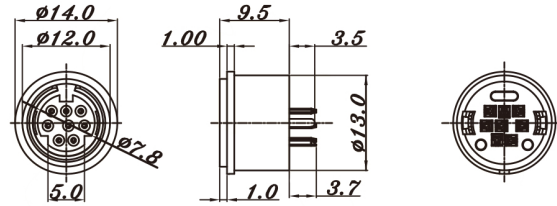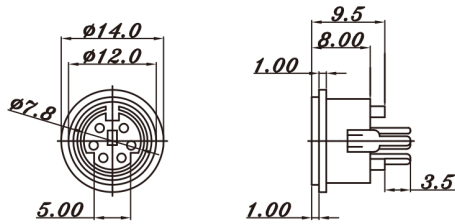

DIN JACK CONNECTOR



MATERIAL

Insulator: Thermoplastic UL94V-0
Contact: Copper Alloy

ELECTRICAL

Current Rating: 1 Amp.
Voltage Rating: 500 Vac Rms.
Operating Temperature: -40°C to 105°C

D555-04-1-N-G-W Standard Packing Tray




Pins
03 04
05 06
07 08
09

Housing Color
1: Black
5: Green
A: Purple

Shell Plated
N: Nickel
T: Tin

Springy Ground
W: With
N: Without

Contact Plated
G: Gold Flash
S: Selective Gold

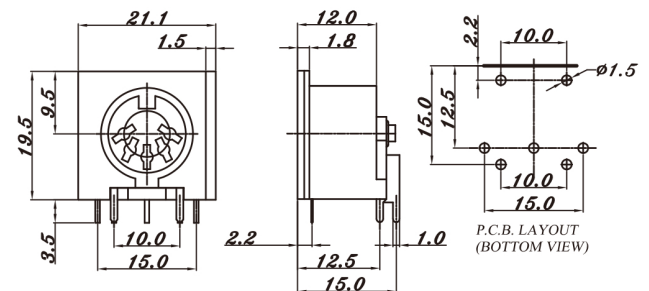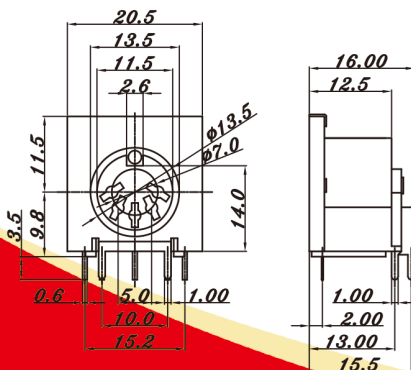

P.C.B. LAYOUT (BOTTOM VIEW)