


Pitch:2.54mm Disconnectable Crimp Type For PCB&Wire

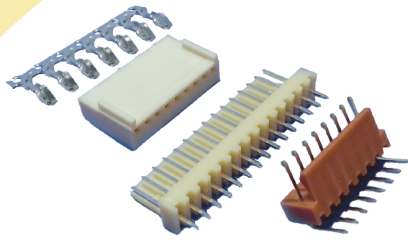

MATERIAL
 Insulator:Thermoplastics
 UL94V-0 or UL94V-2
 Contact:Copper Alloy
 Contact Plated:Tin or Gold over Nickel

SPECIFICATIONS
 Voltage Rating:250V AC,DC
 Current Rating:3A AC,DC
 Withstanding Voltage:1000V AC/minute
 Contact Resistance:10mΩ Max.
 Insulation Resistance:1000MΩ Min.
 Temperature Range:-25°C~+85°C


ORDER INFORMATION

Series No.	Pins	Mounting Type	Contact Plated	Special code
		S	T	
		S: Straight Type R: Right Angle	T: Tin	

1. Bulk pack in bag
2. Tube
3. Tube+Cap
4. Tape & Reel+Cap


D521AW

Wafer Straight Type

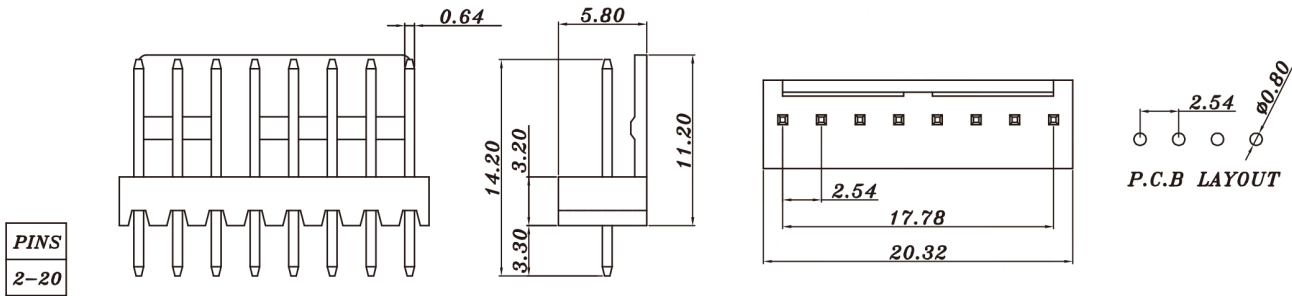


D521AW

Wafer Right Angle

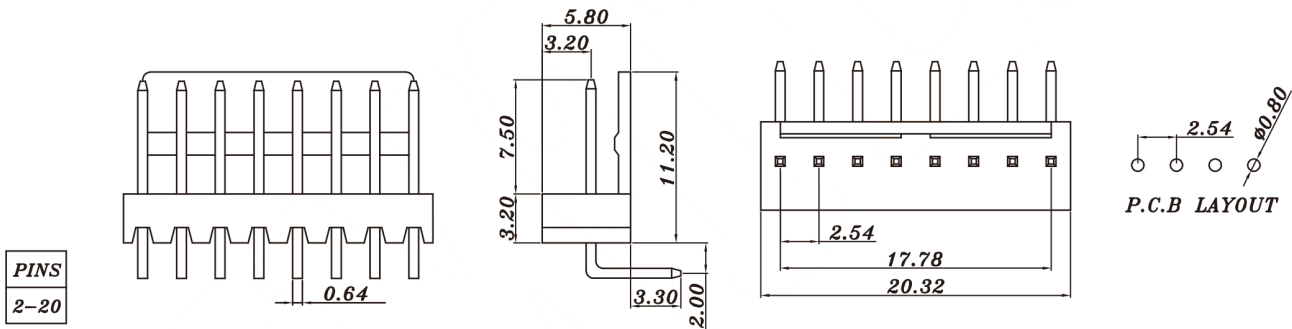

D521AH

Housing

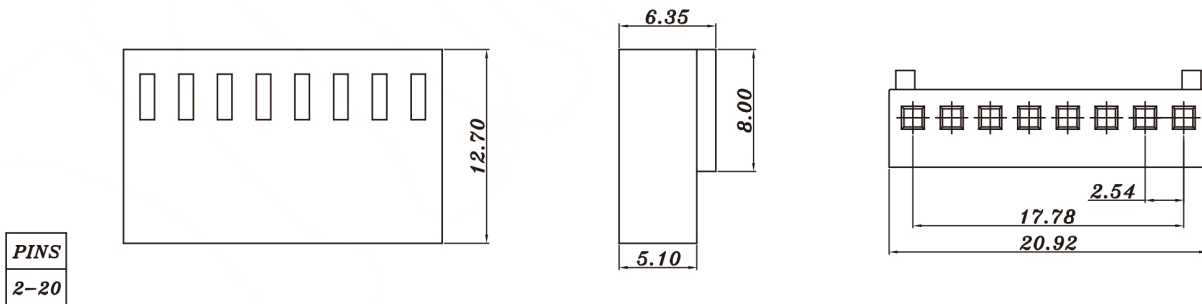

D521AT

Terminal

