

Pitch:2.0mm Disconnectable Crimp Type For PCB&Wire



MATERIAL
 Insulator: Thermoplastics
 UL94V-0 or UL94V-2
 Contact: Copper Alloy
 Contact Plated: Tin or Gold over Nickel


SPECIFICATIONS
 Voltage Rating: 125V AC, DC
 Current Rating: 4A AC, DC
 Withstanding Voltage: 1000V AC/minute
 Contact Resistance: 10mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Temperature Range: -25°C ~ +85°C

ORDER INFORMATION

Series No.	Pins	Mounting Type	Contact Plated	Packing Code
		S	T	
		S: Straight Type R: Right Angle	T: Tin	1. Bulk pack in bag 2. Tube 3. Tube+Cap 4. Tape & Reel+Cap

D515VW


Wafer Straight Type

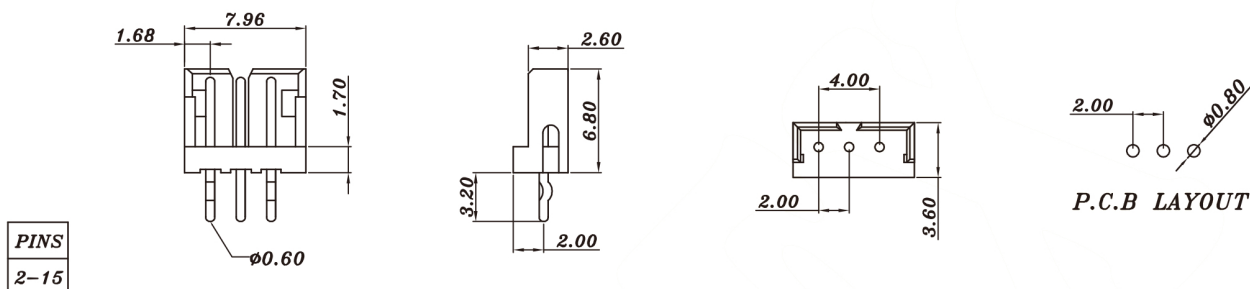

PINS
2-15

D515VW


Wafer Right Angle

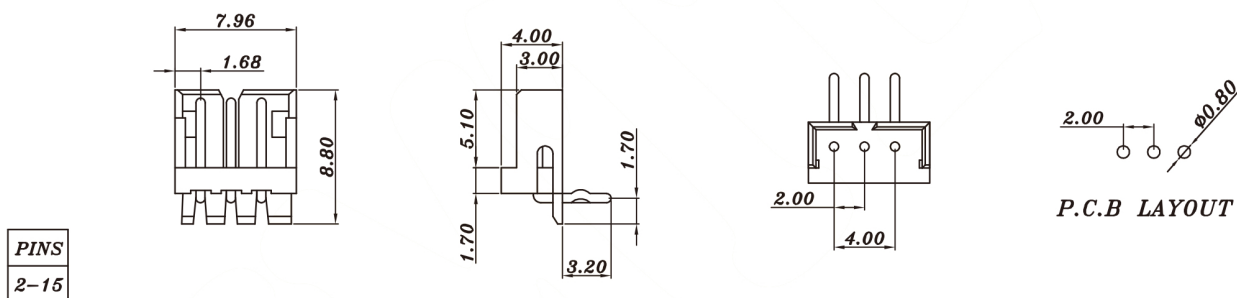

PINS
2-15

D515VH


Housing

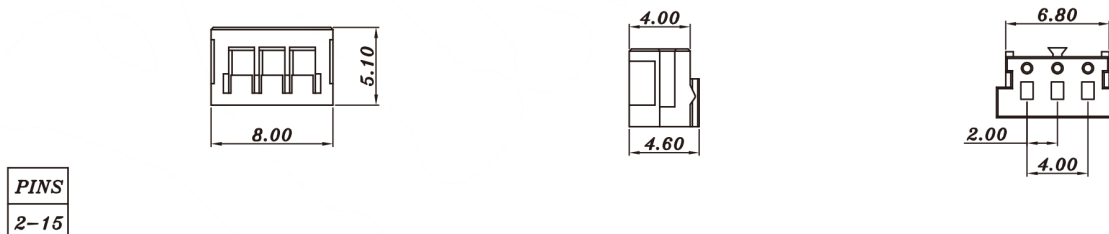

PINS
2-15

D515VT

Terminal

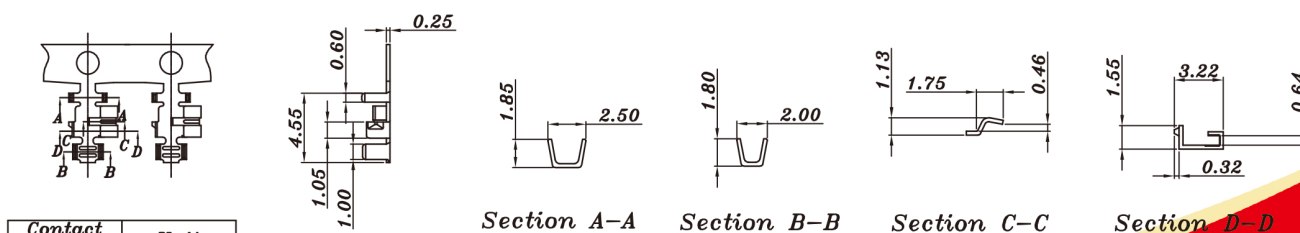

Contact Plated	Unit
Tin	Per Reel