


# Pitch:2.54mm Disconnectable Crimp Type For PCB&Wire

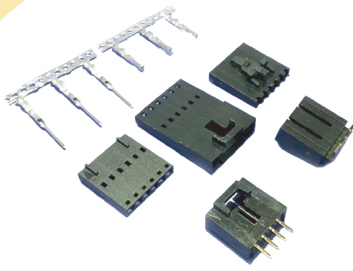

**MATERIAL**  
 Insulator: Thermoplastics  
 UL94V-0 or UL94V-2  
 Contact: Copper Alloy  
 Contact Plated: Tin or Gold over Nickel

**SPECIFICATIONS**  
 Voltage Rating: 250V AC, DC  
 Current Rating: 1A AC, DC  
 Withstanding Voltage: 1000V AC/minute  
 Contact Resistance: 10mΩ Max.  
 Insulation Resistance: 500MΩ Min.  
 Temperature Range: -25°C ~ +85°C


## ORDER INFORMATION

| Series No. | Pins | Mounting Type                      | Contact Plated | Special code |
|------------|------|------------------------------------|----------------|--------------|
|            |      | S                                  | T              |              |
|            |      | S: Straight Type<br>R: Right Angle | T: Tin         |              |

1. Bulk pack in bag  
 2. Tube  
 3. Tube+Cap  
 4. Tape & Reel+Cap


## D 522CW

## Wafer Straight Type/Right Angle

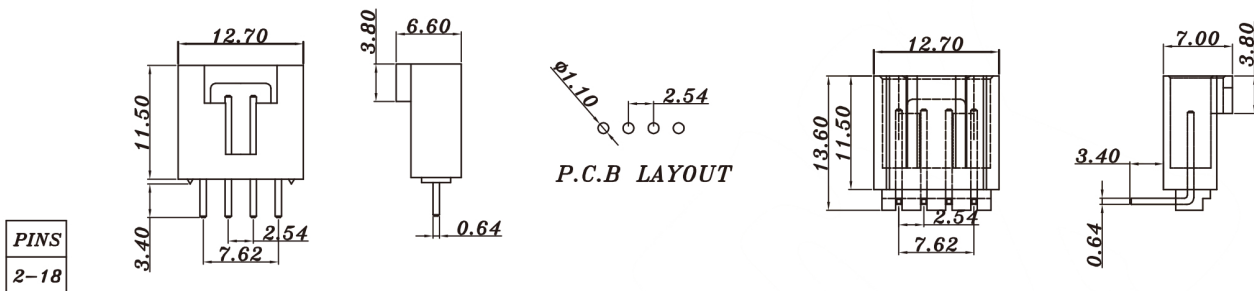


## D 522CH

## Housing

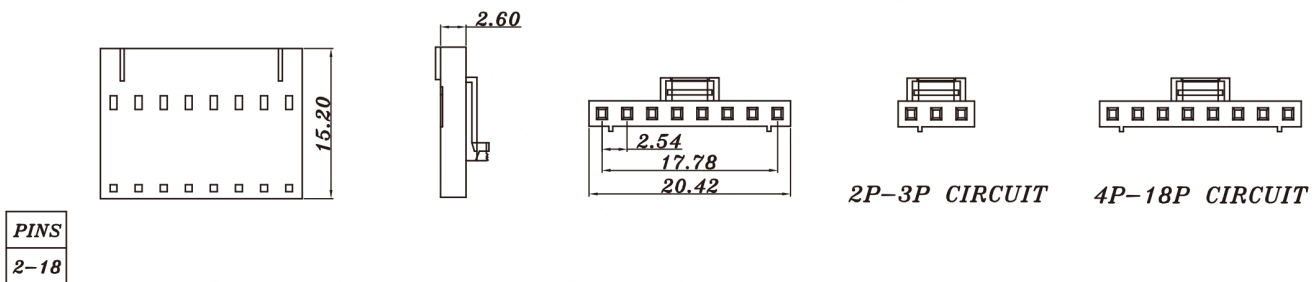

## D 522CH

## Housing

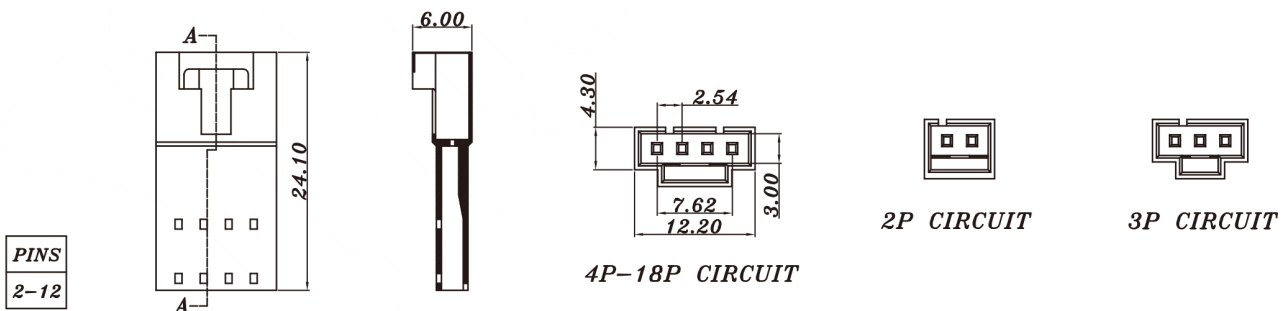

## D 522CST/522CT

## Terminal

