


Pitch:2.0mm Disconnectable Crimp Type For PCB&Wire

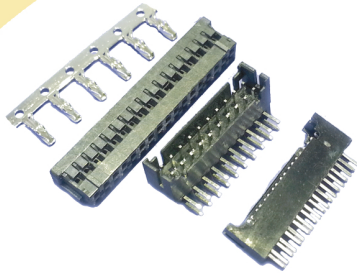

MATERIAL
 Insulator: Thermoplastics
 UL94V-0 or UL94V-2
 Contact: Copper Alloy
 Contact Plated: Tin or Gold over Nickel

SPECIFICATIONS
 Voltage Rating: 250V AC, DC
 Current Rating: 2A AC, DC
 Withstanding Voltage: 800V AC/minute
 Contact Resistance: 30mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Temperature Range: -25°C ~ +85°C

ORDER INFORMATION

Series No.	Pins	Mounting Type	Contact Plated	Special code
		S	T	


S: Straight Type
 R: Right Angle

T: Tin

1. Bulk pack in bag
2. Tube
3. Tube+Cap
4. Tape & Reel+Cap


D 523W

Wafer Straight Type

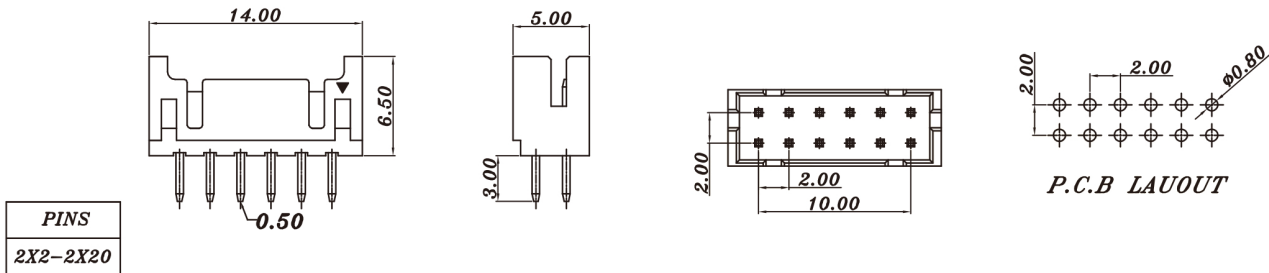


D 523W

Wafer Right Angle

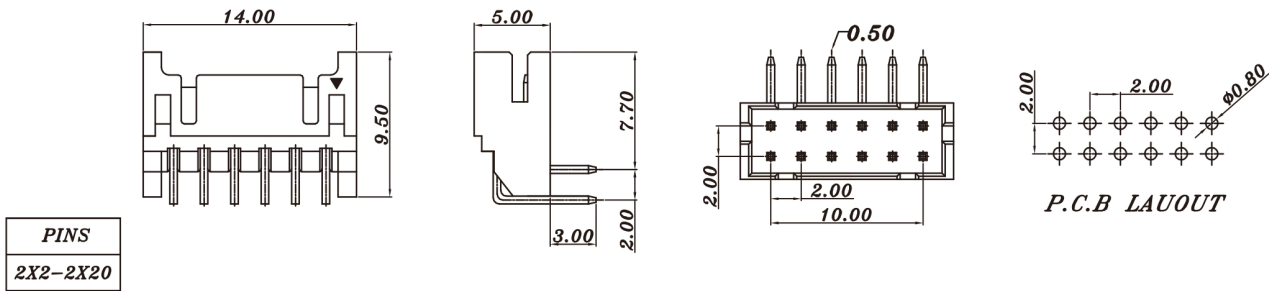

D 523H

Housing

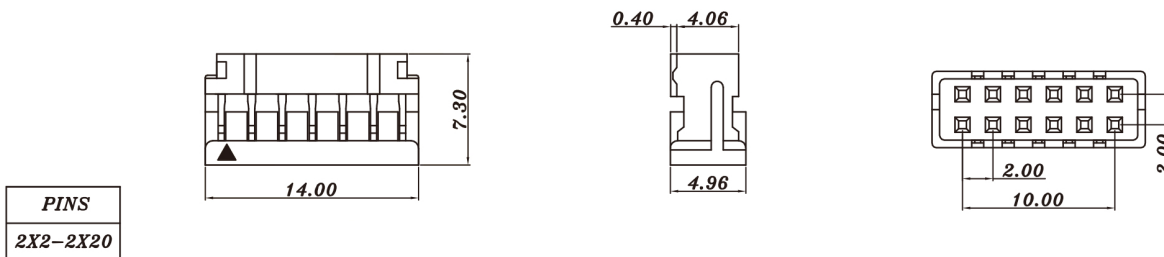

D 523T

Terminal

