


Pitch: 1.25mm Disconnectable Crimp Type For PCB&Wire



MATERIAL
 Insulator: Thermoplastics
 UL94V-0 or UL94V-2
 Contact: Copper Alloy
 Contact Plated: Tin or Gold over Nickel

SPECIFICATIONS
 Voltage Rating: 150V AC, DC
 Current Rating: 1A AC, DC
 Withstanding Voltage: 500V AC/minute
 Contact Resistance: 30mΩ Max.
 Insulation Resistance: 500MΩ Min.
 Temperature Range: -25°C ~ +85°C


ORDER INFORMATION

Series No.	Pins	Mounting Type	Contact Plated	Special code
		S	T	
		S: SMD S/T R: SMD R/A	T: Tin	




1. Bulk pack in bag
 2. Tube
 3. Tube+Cap
 4. Tape & Reel+Cap

D525

Wafer SMD Straight Type




PINS
2X5, 2X6, 2X7
2X10, 2X15, 2X20

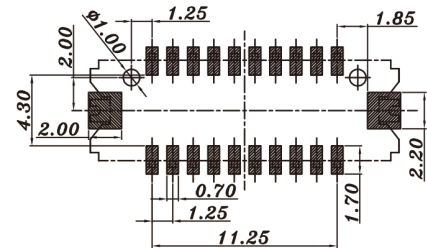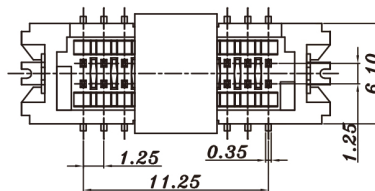




P.C.B LAYOUT

D525

Wafer SMD Straight Type




PINS
2-15

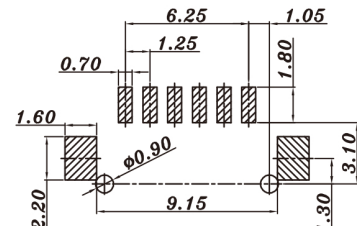




P.C.B LAYOUT

D525

Wafer SMD Right Angle




PINS
2-15






P.C.B LAYOUT

D525H/525T

Housing/Terminal

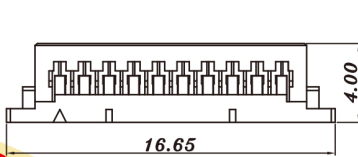

PINS
1X2-1X15
2X5, 2X6, 2X7, 2X10, 2X15, 2X20

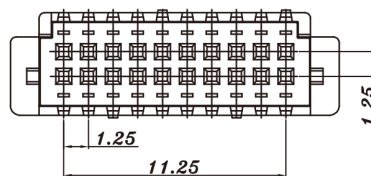

Contact Plated	Unit
Tin	Per Reel