


Pitch:3.0mm Disconnectable Crimp Type For PCB&Wire

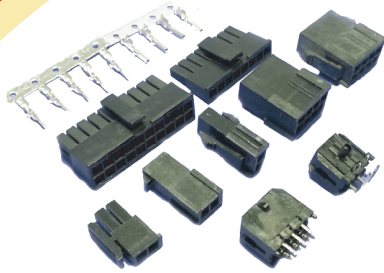

MATERIAL
 Insulator: Thermoplastics
 UL94V-0 or UL94V-2
 Contact: Copper Alloy
 Contact Plated: Tin or Gold over Nickel

SPECIFICATIONS
 Voltage Rating: 250V AC, DC
 Current Rating: 5A AC, DC
 Withstanding Voltage: 1500V AC/minute
 Contact Resistance: 10mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Temperature Range: -25°C ~ +85°C


ORDER INFORMATION

Series No.	Pins	Mounting Type	Contact Plated	Special code
		S	T	
		S: Straight Type R: Right Angle	T: Tin	

1. Bulk pack in bag
 2. Tube
 3. Tube+Cap
 4. Tape & Reel+Cap


D 526WV

Wafer Straight Type

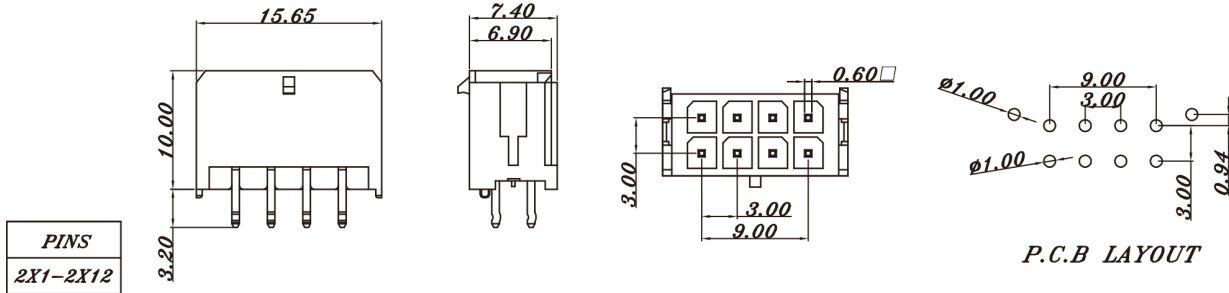


D 526MV

Wafer Right Angle

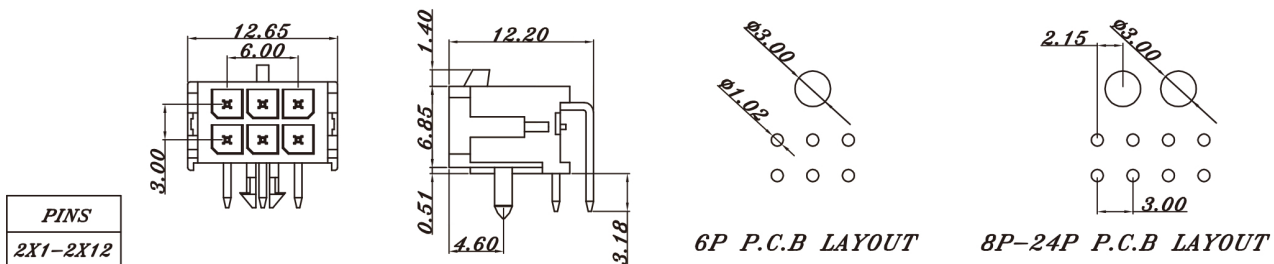

D 526HF/526TFS

Housing/Terminal

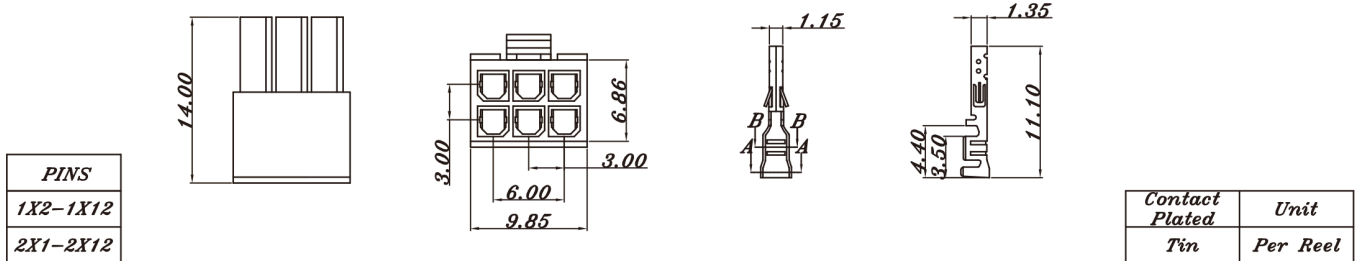

D 526HM/526TFP

Housing/Terminal

