


Pitch:3.5mm Disconnectable Crimp Type For PCB&Wire



MATERIAL

Insulator:Thermoplastics
UL94V-0 or UL94V-2
Contact:Copper Alloy
Contact Plated:Tin or Gold over Nickel

SPECIFICATIONS

Voltage Rating:1400V AC,DC
Current Rating:1A AC,DC
Withstanding Voltage:3800V AC/minute
Contact Resistance:10mΩ Max.
Insulation Resistance:1000MΩ Min.
Temperature Range:-25°C~+85°C

ORDER INFORMATION



Series No.	Pins	Mounting Type	Contact Plated	Special code
		M	T	
		M:SMD R/A	T:Tin	

- 1.Bulk pack in bag
- 2.Tube
- 3.Tube+Cap
- 4.Tape & Reel+Cap

D527MW

Wafer SMD Right Angle

PINS
2



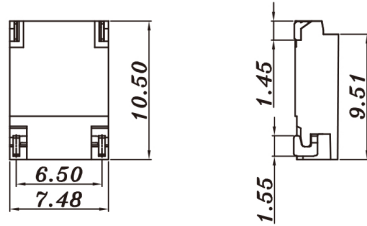


P.C.B LAYOUT

D527MH

Housing




PINS
2



D527MT

Terminal





Contact Plated	Unit
Tin	Per Reel



D527FH/527FT

Housing/Terminal

PINS
2



Contact Plated	Unit
Tin	Per Reel