

D-SUB VERTICAL PCB T/H DIP=12.5mm




MATERIAL



Insulator: Thermoplastic UL94V-0
Contact: Copper Alloy
Shell: Steel & Brass

ELECTRICAL


Current Rating: 1 Amp.
Voltage Rating: 500 Vac Rms.
Operating Temperature: -55°C to 105°C

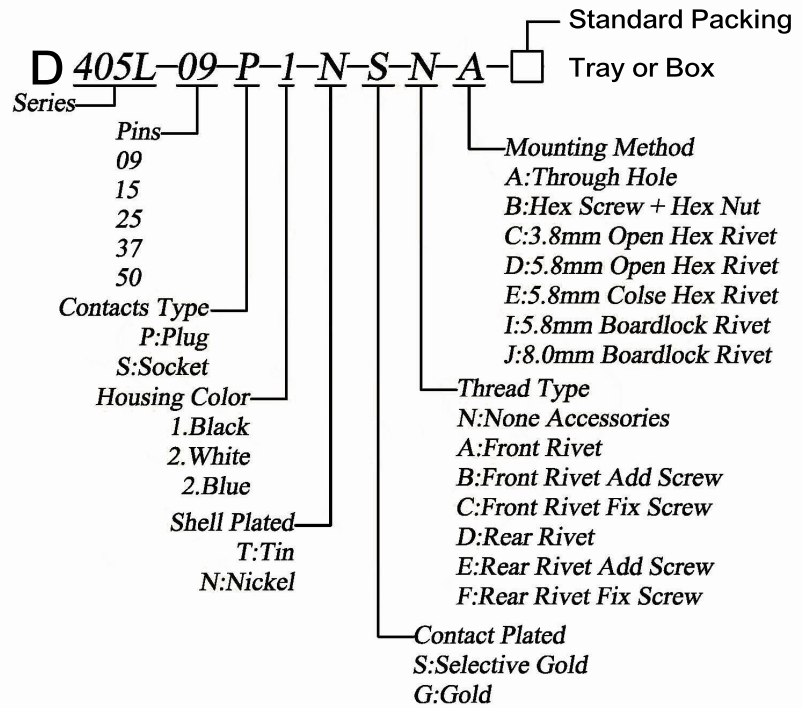

MALE

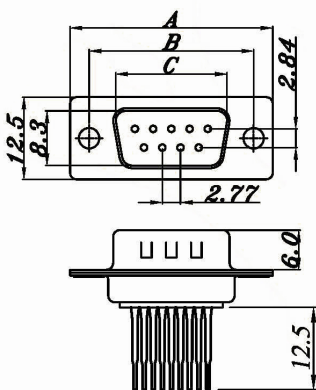

FEMALE

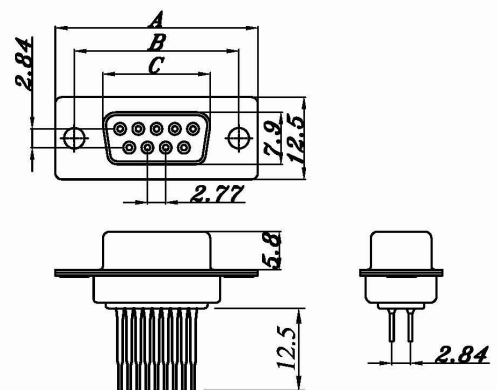

C	B	A	Position	A	B	C
16.92	25.00	30.8	9P/9S	30.8	25.00	16.3
25.25	33.30	39.2	15P/15S	39.2	33.30	24.6
38.96	47.10	53.1	25P/25S	53.1	47.10	38.3
55.42	63.50	69.4	37P/37S	69.4	63.50	54.8

