


Pitch:2.54mm PLCC Socket DIP Type For PCB

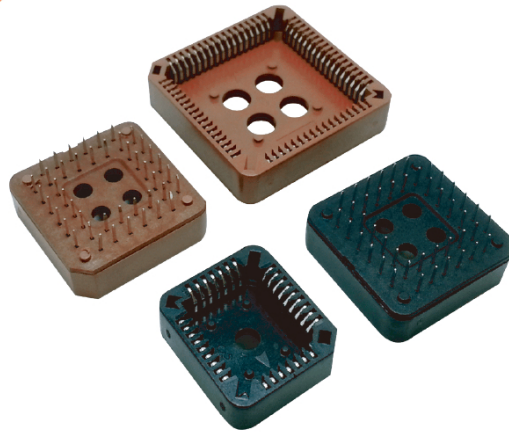

MATERIAL

Insulator:PBT or PPS UL94V-0

Contact:Copper Alloy




SPECIFICATIONS

Current Rating:1A AC,DC

Withstanding Voltage:500V AC/minute

Insulation Resistance:1000MΩ Min. at 500V DC.

Temperature Range:-55°C~+105°C

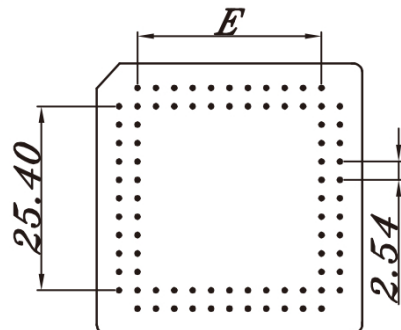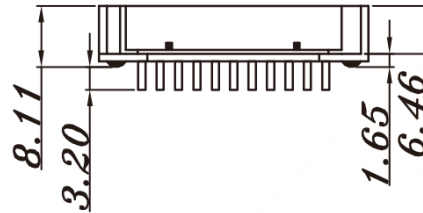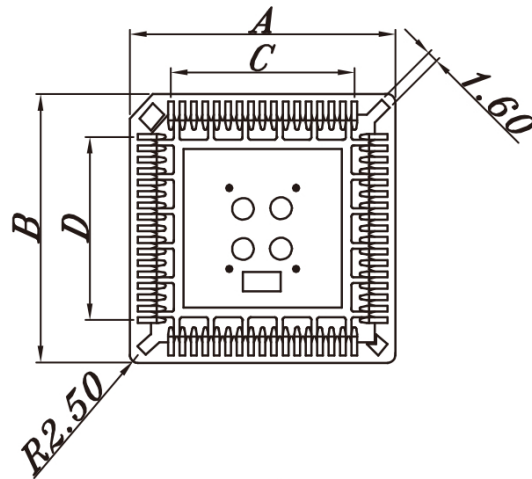

D 551-20-P-T-□

Series —
Pins —
20,28,32,44
52,68,84

Plastic Material —
P:PBT Black
S:PPS Brown

Standard Packing-Tube
Contact Plated
T: Tin

POSITION	A	B	C	D	E	F
20	15.50	15.50	5.08	5.08	5.08	5.08
28	18.04	18.04	7.62	7.62	7.62	7.62
32	18.04	20.54	7.62	10.16	7.62	10.16
44	23.48	23.48	12.70	12.70	12.70	12.70
52	25.88	25.88	15.24	15.24	15.24	15.24
68	31.04	31.04	20.32	20.32	20.32	20.32
84	36.04	36.04	25.40	25.40	25.40	25.40