


Pitch:1.27mm PLCC Socket SMD Type For PCB

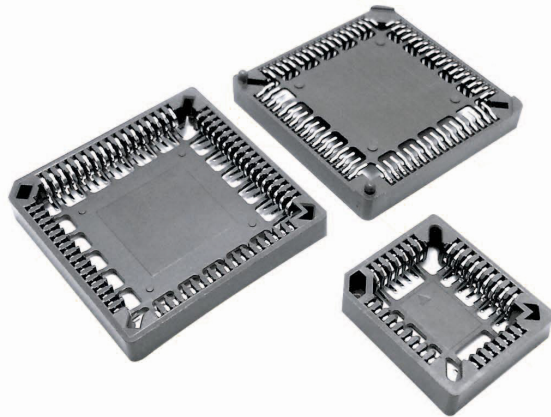

MATERIAL

Insulator:PPS UL94V-0

Contact:Copper Alloy



SPECIFICATIONS

Current Rating:1A AC,DC


Withstanding Voltage:500V AC/minute

Insulation Resistance:1000M Ω Min. at 500V DC.

Temperature Range:-55°C~+105°C

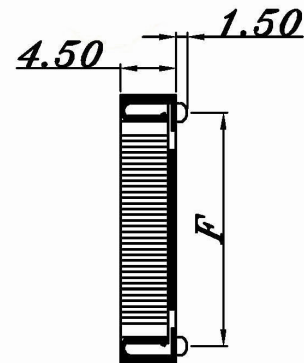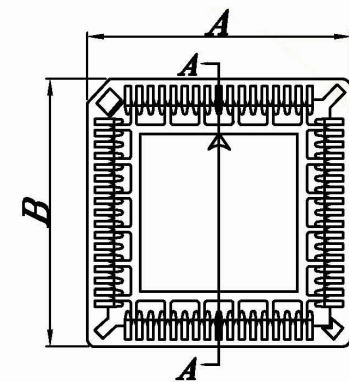

SECTION A-A

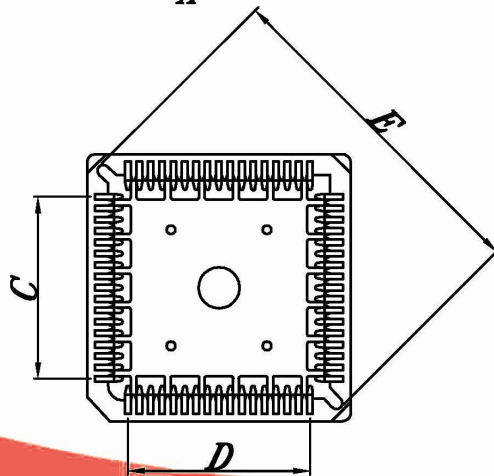

D 552-20-S-N-T-☐

Series Pins Plastic Material Standard Packing-Tube

 20,28,32,44 S:PPS Contact Plated T: Tin

 52,68,84 Peg W: With

 N: None

POSITION	A	B	C	D	E	F
20	15.24	15.24	5.08	5.08	16.70	12.70
28	17.78	17.78	7.62	7.62	20.30	15.24
32	18.20	20.74	7.62	10.16	22.76	17.78
44	23.28	23.28	12.70	12.70	28.05	20.32
52	25.74	25.74	15.24	15.24	31.13	22.86
68	30.82	30.82	20.32	20.32	38.31	27.94
84	35.90	35.90	25.40	25.40	45.50	33.02

DAJ ENTERPRISE CO., LTD.