


USB B TYPE VERTICAL & R/A TYPE



MATERIAL

Insulator: Thermoplastic UL94V-0

Contact: Copper Alloy

Shell: Brass






ELECTRICAL

Current Rating: 1.5Amp.


Voltage Rating: 750 Vac Rms.

Operating Temperature: -55°C to 105°C

Series **D102-04-D-2-N-S** □
 Pins 04
 D: Vertical
 R: R/A
 Housing Color
 1: Black (PBT)
 2: White (PBT)
 Contact Plated
 S: Selective Gold
 S3: 30u" Selective Gold
 Shell Plated
 T: Tin
 N: Nickel
 □ Standard Packing: Tray



P.C.B LAYOUT
BOTTOM VIEW



P.C.B LAYOUT
BOTTOM VIEW

USB B SMD VERTICAL & R/A TYPE



MATERIAL

Insulator: Thermoplastic UL94V-0

Contact: Copper Alloy

Shell: Brass







ELECTRICAL

Current Rating: 1.5Amp.


Voltage Rating: 750 Vac Rms.

Operating Temperature: -55°C to 105°C

Series **D102-04-M-2-N-S** □
 Pins 04
 V: SMD<Vertical>
 M: SMD<R/A>
 Housing Color
 1: Black (PBT)
 2: White (PBT)
 Contact Plated
 S: Selective Gold
 Shell Plated
 T: Tin
 N: Nickel
 □ Standard Packing: Tray

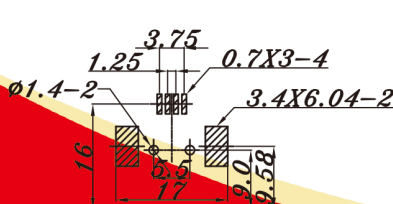

P.C.B LAYOUT
BOTTOM VIEW



P.C.B LAYOUT
BOTTOM VIEW