


Pitch=1.27mm SCSI R/A RIBBON TYPE






MATERIAL

Insulator: Thermoplastic UL94V-0
Contact: Copper Alloy


ELECTRICAL

Current Rating: 1 Amp.
Voltage Rating: 500 Vac Rms.
Operating Temperature: -55°C to 85°C

D205-26S-1-N-S-N-N-□
Series — Pins — Accessories
14S 20S N:S Type
26S 36S W:L Type
50S 68S Thread Type
100S Rivet W/Boardlock
Housing Color — N:2#56
1:Black M:4#40
Shell Plated P:M2.6
N:Nickel Contact Plated
S:Selective Gold
S1:5u" Selective Gold

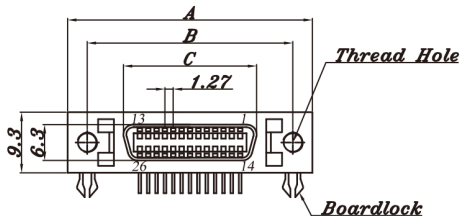

L Type



S Type



NO.OF CONTACTS	A	B	C
14	29.57	23.64	12.63
20	33.40	27.40	16.44
26	37.19	31.26	20.25
36	43.54	37.61	26.60
50	52.50	46.50	35.49
68	64.00	57.92	46.92
100	84.18	78.23	67.10

Pitch=1.27mm SCSI VERTICAL RIBBON TYPE






MATERIAL

Insulator: Thermoplastic UL94V-0
Contact: Copper Alloy


ELECTRICAL

Current Rating: 1 Amp.
Voltage Rating: 500 Vac Rms.
Operating Temperature: -55°C to 85°C


D205S-26S-1-N-S-N-N-□
Series — Pins — Accessories
26S 36S N:S Type
50S 68S W:L Type
Thread Type
Rivet W/Boardlock
Housing Color — N:2#56
1:Black M:4#40
Shell Plated P:M2.6
N:Nickel Contact Plated
S:Selective Gold
S1:5u" Selective Gold

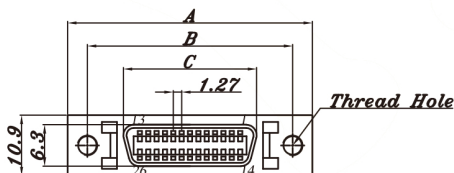

L Type



S Type



NO.OF CONTACTS	A	B	C
26	37.20	31.20	20.25
36	43.50	37.60	26.60
50	52.60	46.80	35.40
68	64.00	57.90	46.90