

Pitch=1.27mm SCSI R/A PIN TYPE



MATERIAL

Insulator: Thermoplastic UL94V-0
Contact: Copper Alloy

ELECTRICAL

Current Rating: 1 Amp.
Voltage Rating: 500 Vac Rms.
Operating Temperature: -55°C to 85°C

D205C-26S-1-N-S-N-N-□

Series

Pins

26S

50S

68S

100S

Housing Color

1: Black

Shell Plated

N: Nickel

□ Standard Packing-Tray

Accessories

N: S Type

W: L Type

Thread Type

Rivet W/Boardlock

N: #2#56




M: #4#40

P: M2.6


Contact Plated

S: Selective Gold

S1: 5u" Selective Gold

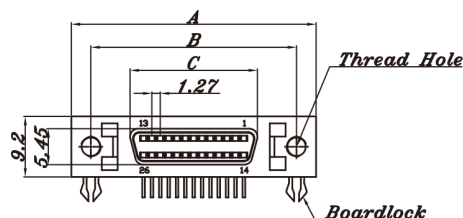

L Type



S Type



NO. OF CONTACTS	A	B	C
26	37.19	31.26	19.45
50	52.43	46.49	34.70
68	63.86	57.92	46.13
100	84.18	78.23	66.45

Pitch=1.27mm SCSI VERTICAL PIN TYPE



MATERIAL

Insulator: Thermoplastic UL94V-0
Contact: Copper Alloy

ELECTRICAL

Current Rating: 1 Amp.
Voltage Rating: 500 Vac Rms.
Operating Temperature: -55°C to 85°C

D205E-26S-1-N-S-N-N-□

Series

Pins

26S

36S

50S

68S

Housing Color

1: Black

Shell Plating

N: Nickel

□ Standard Packing-Tray

Accessories

N: S Type

W: L Type

Thread Type

Rivet W/Boardlock

N: #2#56


M: #4#40

P: M2.6

Contact Plated

S: Selective Gold



S1: 5u" Selective Gold

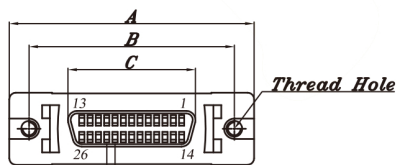

L Type



S Type



NO. OF CONTACTS	A	B	C
26	37.20	31.20	19.46
36	43.50	37.60	28.80
50	52.60	46.80	34.70
68	64.00	57.90	46.20