



Pitch: 1.0mm Disconnectable Crimp Type For PCB&Wire

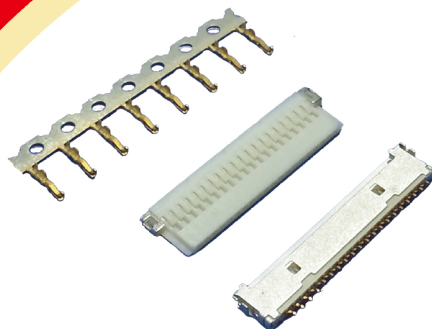

MATERIAL
 Insulator: Thermoplastics
 UL94V-0 or UL94V-2
 Contact: Copper Alloy
 Contact Plated: Tin or Gold over Nickel

SPECIFICATIONS
 Voltage Rating: 100V AC, DC
 Current Rating: 1A AC, DC
 Withstanding Voltage: 500V AC/minute
 Contact Resistance: 30mΩ Max.
 Insulation Resistance: 500MΩ Min.
 Temperature Range: -25°C ~ +85°C

Series No. Pins Mounting Type Contact Plated Packing Code




M: SMD Type

G: Gold Flash



1. Bulk pack in bag
2. Tube
3. Tube+Cap
4. Tape & Reel+Cap

D500W

Wafer SMD Right Angle

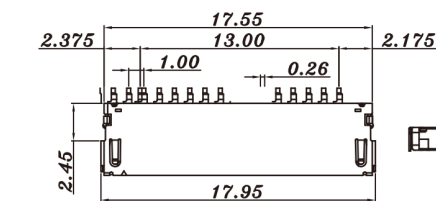


PINS
8, 14, 20, 30

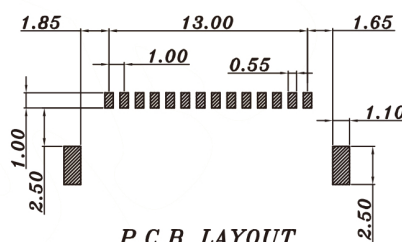



P.C.B LAYOUT

D500H

Housing




PINS
8, 14, 20, 30





D500T


Terminal



Contact Plated	Unit
Tin	Per Reel



Section A-A



Section B-B

DAJ ENTERPRISE CO., LTD.