


Pitch:2.0mm Disconnectable Crimp Type For PCB&Wire



MATERIAL
 Insulator: Thermoplastics
 UL94V-0 or UL94V-2
 Contact: Copper Alloy
 Contact Plated: Tin or Gold over Nickel


SPECIFICATIONS
 Voltage Rating: 250V AC, DC
 Current Rating: 1A AC, DC
 Withstanding Voltage: 1000V AC/minute
 Contact Resistance: 10mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Temperature Range: -25°C ~ +85°C

Series No.	Pins	Mounting Type	Contact Plated	SMD Type	Packing Code
		S	T		
		S: Straight Type R: Right Angle	T: Tin	V: SMD S/T R: SMD R/A	

1. Bulk pack in bag
2. Tube
3. Tube+Cap
4. Tape & Reel+Cap


D 503PW

Wafer Straight Type/Right Angle

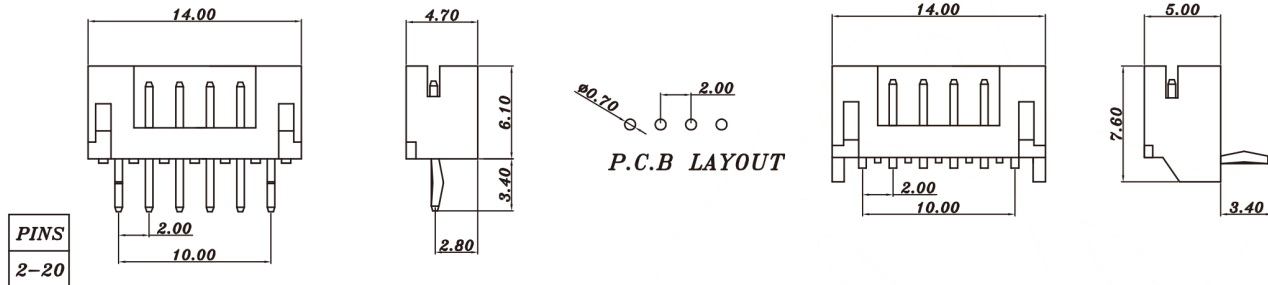


D 503PW

Wafer SMD Straight Type

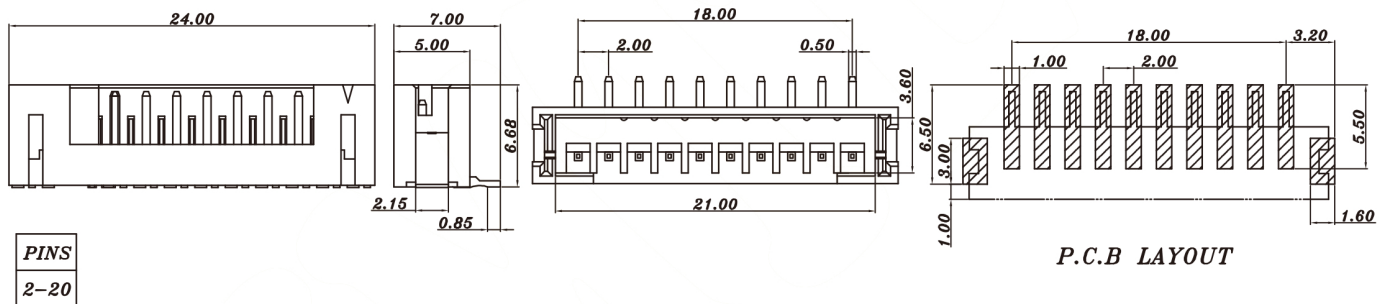

D 503PW

Wafer SMD Right Angle

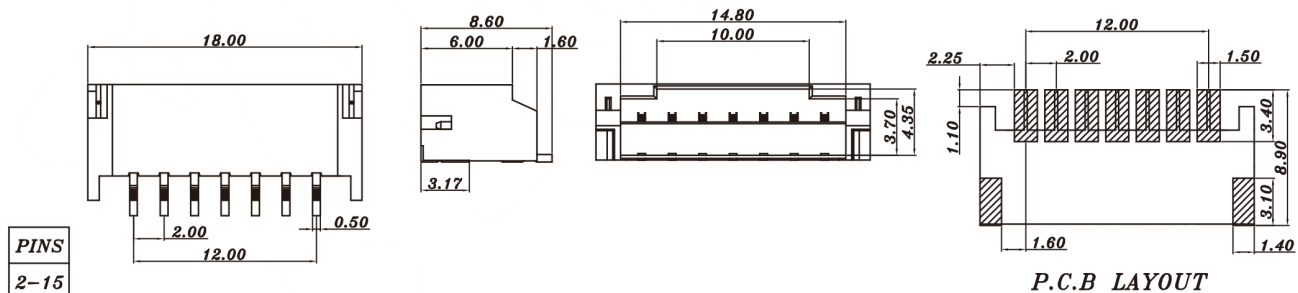

D 503PH/503PT

Housing/Terminal

