


Pitch:2.0mm Disconnectable Crimp Type For PCB&Wire



MATERIAL
 Insulator: Thermoplastics
 UL94V-0 or UL94V-2
 Contact: Copper Alloy
 Contact Plated: Tin or Gold over Nickel

SPECIFICATIONS
 Voltage Rating: 100V AC, DC
 Current Rating: 1A AC, DC
 Withstanding Voltage: 1200V AC/minute
 Contact Resistance: 10mΩ Max.
 Insulation Resistance: 500MΩ Min.
 Temperature Range: -25°C ~ +85°C

Series No. Pins Mounting Type Contact Plated Packing Code


S: Straight Type T: Tin

R: Right Angle

1. Bulk pack in bag
2. Tube
3. Tube+Cap
4. Tape & Reel+Cap


D 505JW

Wafer Straight Type

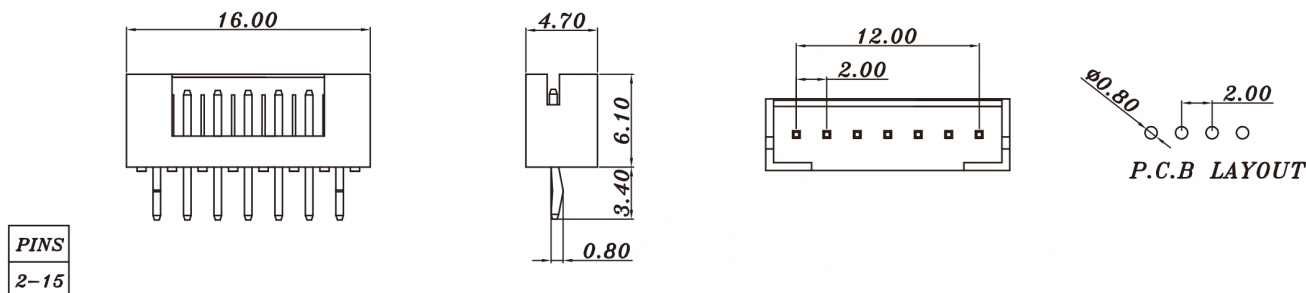


D 505JW

Wafer Right Angle

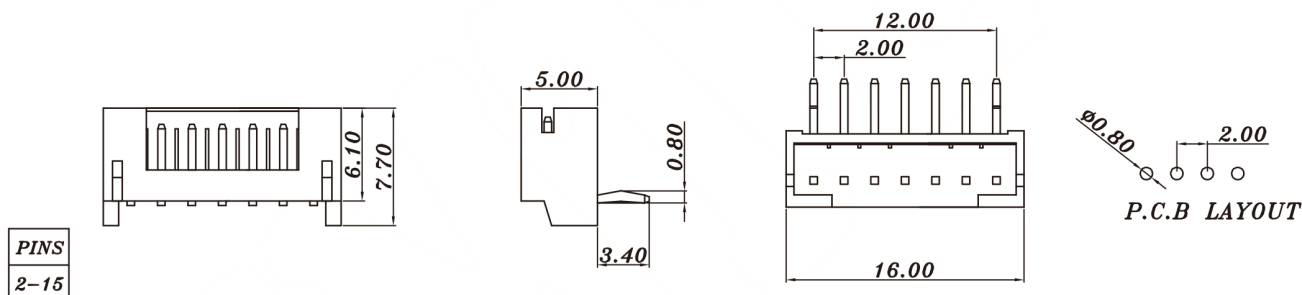

D 505JH

Housing

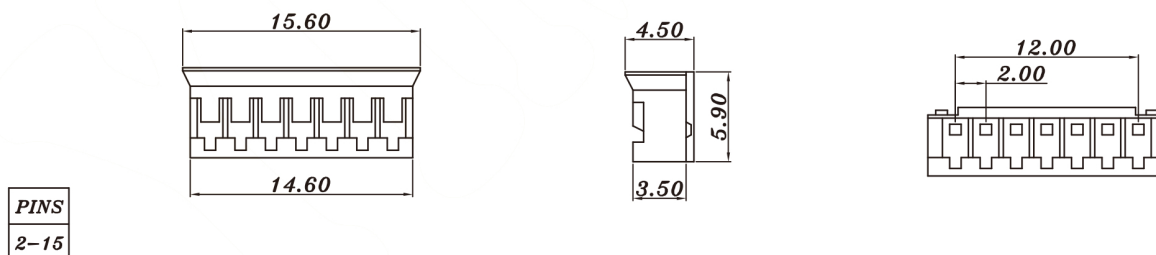

D 505JT

Terminal

