


Pitch:2.5mm Disconnectable Crimp Type For PCB&Wire

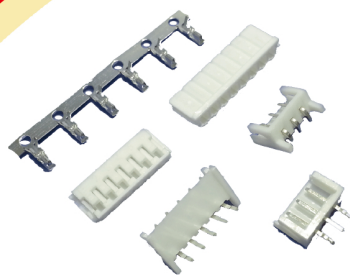

MATERIAL
 Insulator:Thermoplastics
 UL94V-0 or UL94V-2
 Contact:Copper Alloy
 Contact Plated:Tin or Gold over Nickel

SPECIFICATIONS
 Voltage Rating:250V AC,DC
 Current Rating:3A AC,DC
 Withstanding Voltage:800V AC/minute
 Contact Resistance:10mΩ Max.
 Insulation Resistance:1000MΩ Min.
 Temperature Range:-25°C~+85°C

Series No. Pins Mounting Type Contact Plated Packing Code


S: Straight Type T: Tin

R: Right Angle

- 1.Bulk pack in bag
- 2.Tube
- 3.Tube+Cap
- 4.Tape & Reel+Cap


D511EW

Wafer Straight Type

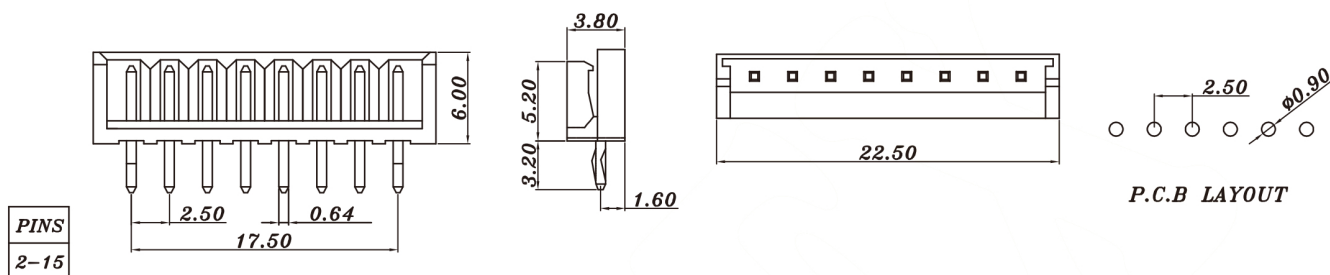


D511EW

Wafer Right Angle

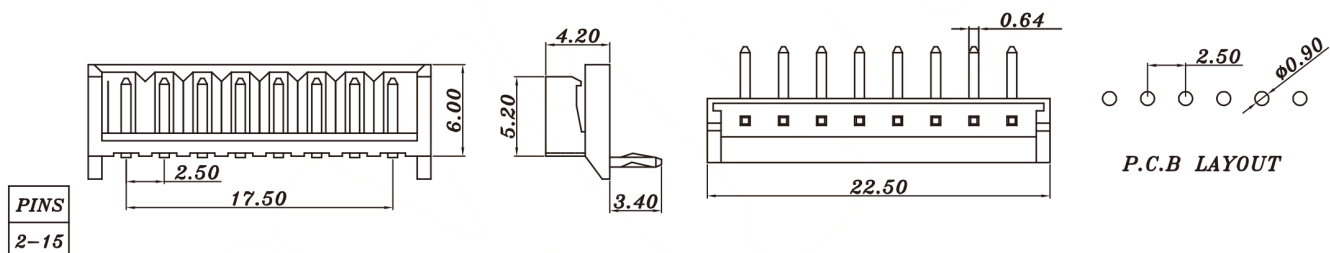

D511EH

Housing

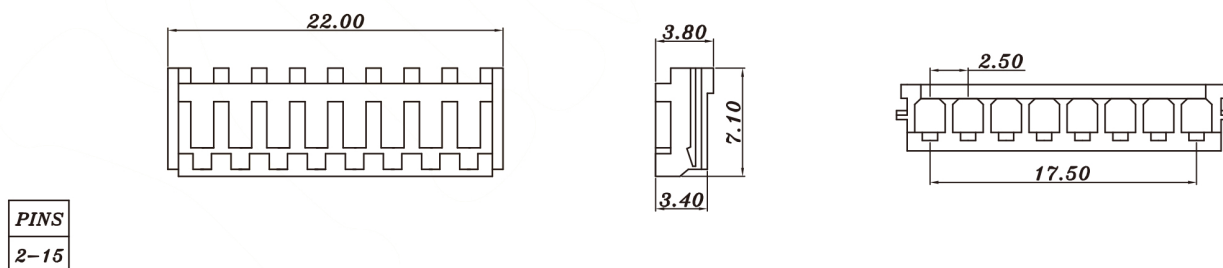

D511ET

Terminal

