


Pitch:2.5mm Disconnectable Crimp Type For PCB&Wire

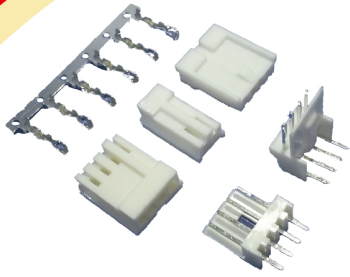

MATERIAL
 Insulator:Thermoplastics
 UL94V-0 or UL94V-2
 Contact:Copper Alloy
 Contact Plated:Tin or Gold over Nickel


SPECIFICATIONS
 Voltage Rating:250V AC,DC
 Current Rating:3A AC,DC
 Withstanding Voltage:800V AC/minute
 Contact Resistance:10mΩ Max.
 Insulation Resistance:500MΩ Min.
 Temperature Range:-25°C~+85°C

ORDER INFORMATION

Series No.	Pins	Mounting Type	Contact Plated	Packing Code
		S	T	
		S: Straight Type R: Right Angle	T: Tin	1. Bulk pack in bag 2. Tube 3. Tube+Cap 4. Tape & Reel+Cap


D512CW

Wafer Straight Type

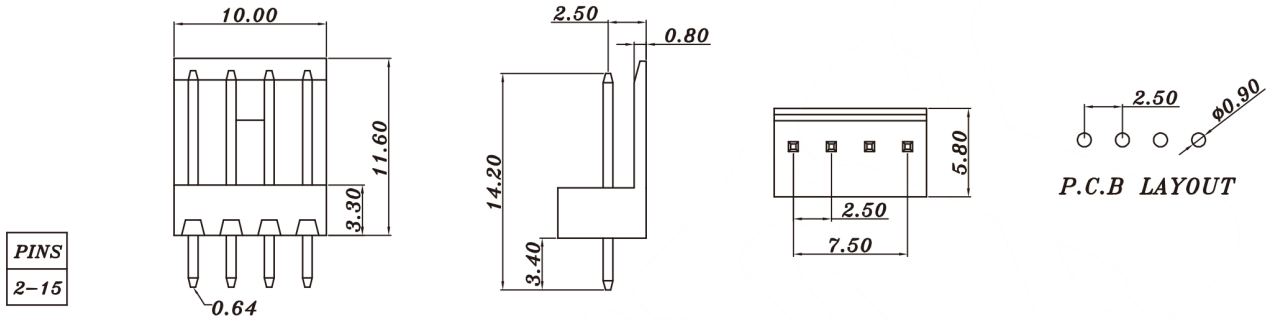


D512CW

Wafer Right Angle

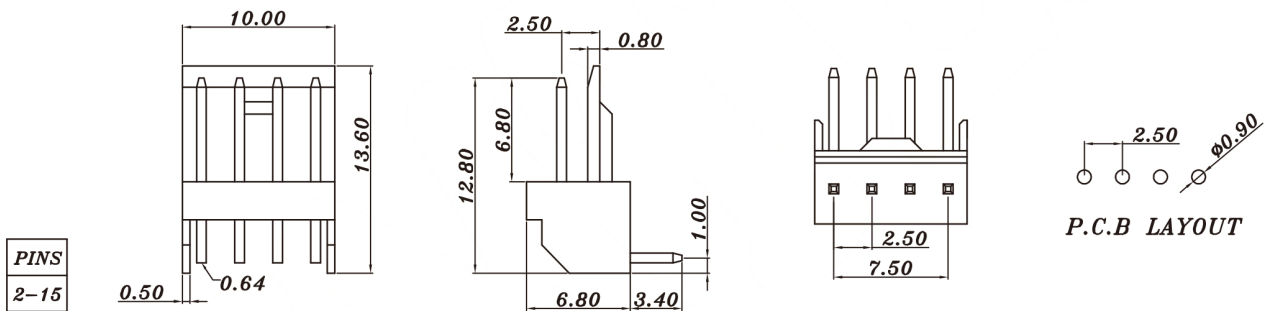

D512CH

Housing

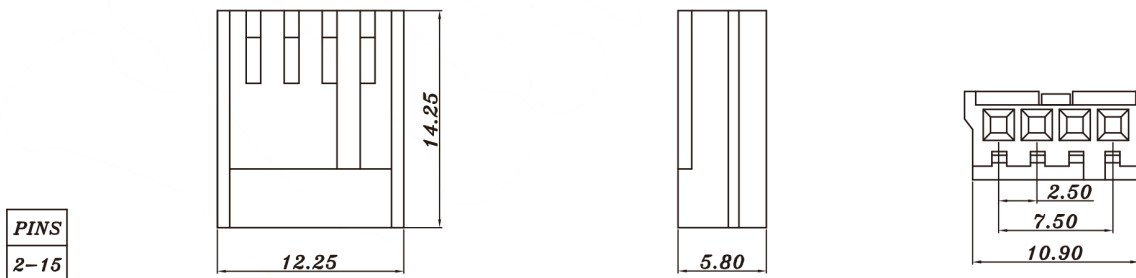

D512CT

Terminal

