

Pitch:2.5mm Disconnectable Crimp Type For PCB&Wire



MATERIAL

Insulator:Thermoplastics

UL94V-0 or UL94V-2

Contact:Copper Alloy

Contact Plated:Tin or Gold over Nickel

SPECIFICATIONS

Voltage Rating:250V AC,DC

Current Rating:3A AC,DC

Withstanding Voltage:1500V AC/minute

Contact Resistance:10mΩ Max.

Insulation Resistance:500MΩ Min.

Temperature Range:-25°C~+85°C

ORDER INFORMATION

Series No.



Pins



Contact Plated



T
T: Tin

Special code



Packing Code




- 1.Bulk pack in bag
- 2.Tube
- 3.Tube+Cap
- 4.Tape & Reel+Cap

D514HF

Housing


PINS
2-12

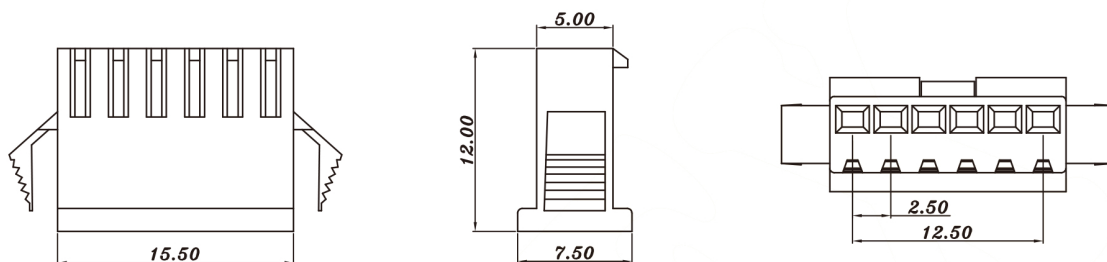

D514TF

Terminal


Contact Plated	Unit
Tin	Per Reel

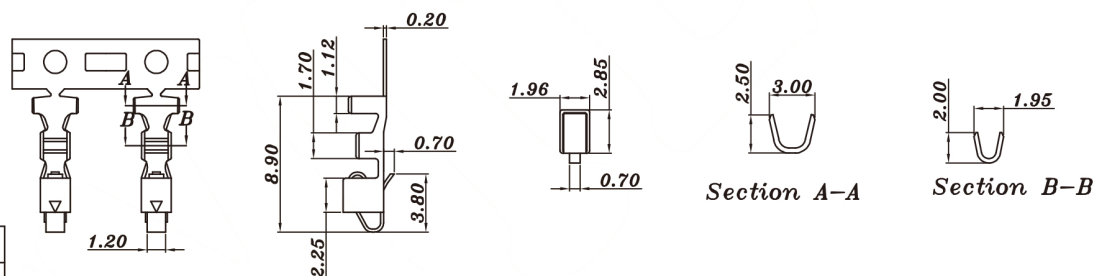

D514HM

Housing


PINS
2-12

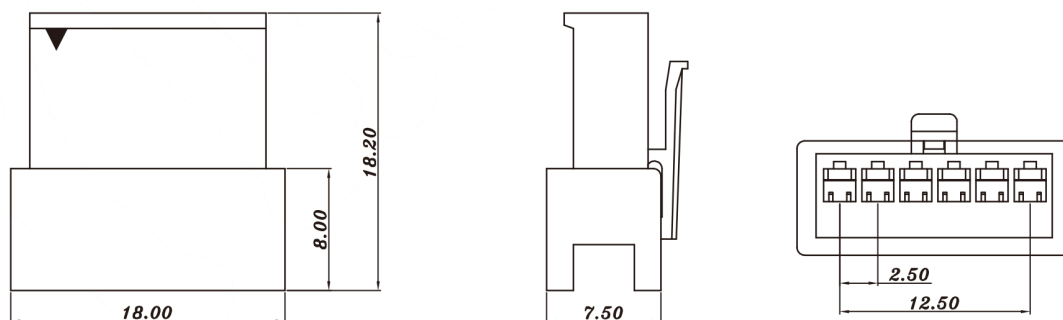

D514TM

Terminal

Contact Plated	Unit
Tin	Per Reel

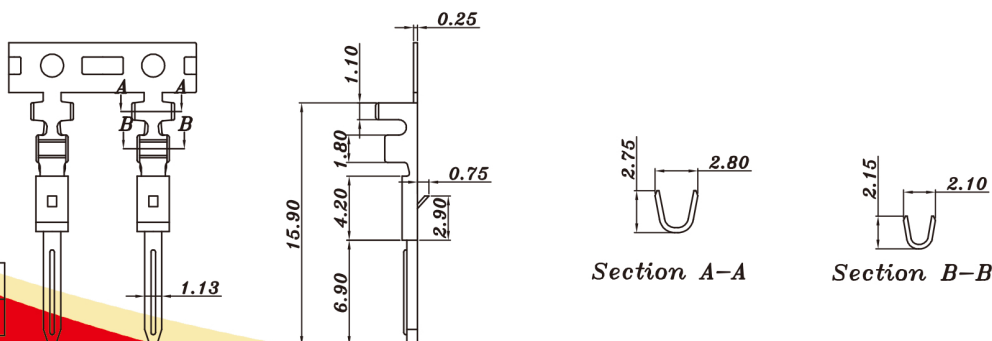

DAJ ENTERPRISE CO., LTD.