


Pitch:2.0mm Disconnectable Crimp Type For PCB&Wire

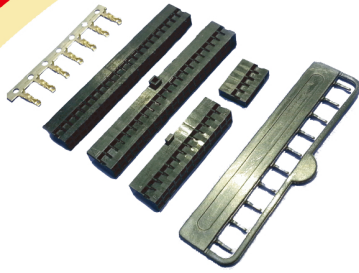

MATERIAL
 Insulator:Thermoplastics
 UL94V-0 or UL94V-2
 Contact:Copper Alloy
 Contact Plated:Tin or Gold over Nickel





SPECIFICATIONS
 Voltage Rating:250V AC,DC
 Current Rating:1A AC,DC
 Withstanding Voltage:1500V AC/minute
 Contact Resistance:10mΩ Max.
 Insulation Resistance:500MΩ Min.
 Temperature Range:-25°C~+85°C

Series No. Pins Bump Contact Plated Packing Code
 N T
 W:With T:Tin
 N:None

1.Bulk pack in bag
 2.Tube
 3.Tube+Cap
 4.Tape & Reel+Cap

D 504DH/504DT


Housing/Terminal



PINS
1X2-1X40
2X2-2X25

Contact Plated	Unit
Gold Flash	Per Reel

Pitch:2.54mm Disconnectable Crimp Type For PCB&Wire

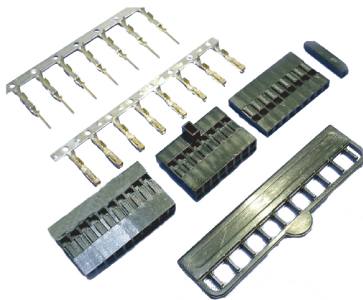

MATERIAL
 Insulator:Thermoplastics
 UL94V-0 or UL94V-2
 Contact:Copper Alloy
 Contact Plated:Tin or Gold over Nickel

SPECIFICATIONS
 Voltage Rating:250V AC,DC
 Current Rating:3A AC,DC
 Withstanding Voltage:1000V AC/minute
 Contact Resistance:10mΩ Max.
 Insulation Resistance:500MΩ Min.
 Temperature Range:-25°C~+85°C

ORDER INFORMATION




Series No. Pins Bump Contact Plated Packing Code
 N S
 W:With S:Selective Gold
 N:None T:Tin

*Special Options Contact Our Sales Team.

1.Bulk pack in bag
 2.Tube
 3.Tube+Cap
 4.Tape & Reel+Cap

D 520DH





Housing




PINS
1X1-1X40
2X2-2X40

D 520DT

Terminal Male/Female

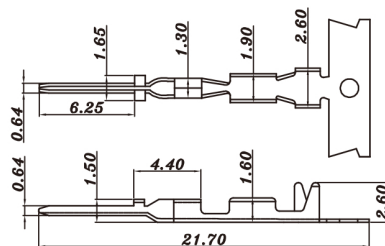

Section A-A



Section B-B

Contact Plated	Unit
Gold Flash	Per Reel