


Pitch:1.25mm Disconnectable Crimp Type For PCB&Wire

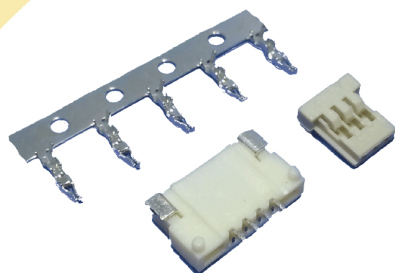

MATERIAL
 Insulator: Thermoplastics
 UL94V-0 or UL94V-2
 Contact: Copper Alloy
 Contact Plated: Tin or Gold over Nickel

SPECIFICATIONS
 Voltage Rating: 150V AC, DC
 Current Rating: 1A AC, DC
 Withstanding Voltage: 500V AC/minute
 Contact Resistance: 30mΩ Max.
 Insulation Resistance: 500MΩ Min.
 Temperature Range: -25°C ~ +85°C

Series No. Pins Mounting Type Contact Plated Packing Code


M
 M: SMD R/A

T
 T: Tin

1. Bulk pack in bag
2. Tube
3. Tube+Cap
4. Tape & Reel+Cap


D528FW

Wafer SMD Right Angle

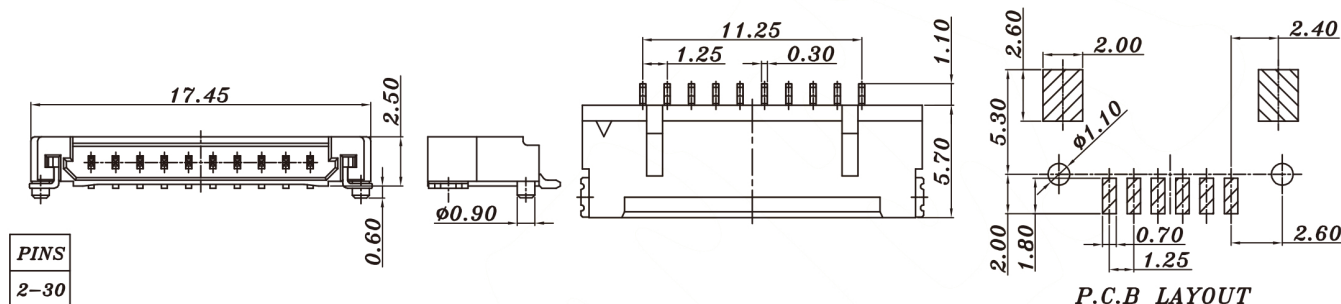

D528FH

Housing

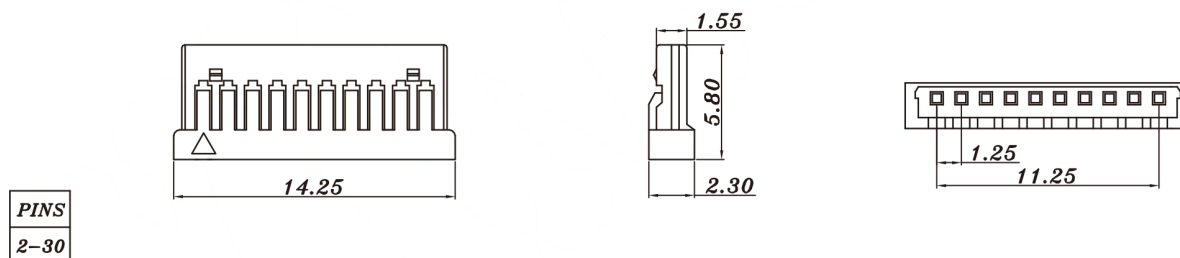

D528FT

Terminal

