


Pitch:3.96mm Disconnectable Crimp Type For PCB&Wire

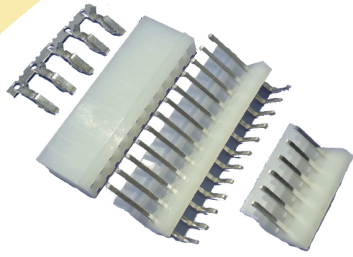

MATERIAL
 Insulator:Thermoplastics
 UL94V-0 or UL94V-2
 Contact:Copper Alloy
 Contact Plated:Tin or Gold over Nickel

SPECIFICATIONS
 Voltage Rating:250V AC,DC
 Current Rating:5~7A AC,DC
 Withstanding Voltage:1500V AC/minute
 Contact Resistance:10mΩ Max.
 Insulation Resistance:500MΩ Min.
 Temperature Range:-25°C~+85°C

Series No. Pins Mounting Type Contact Plated Packing Code

S T




S: Straight Type
 R: Right Angle

T: Tin

1. Bulk pack in bag
 2. Tube
 3. Tube+Cap
 4. Tape & Reel+Cap




D531WW

Wafer Straight Type

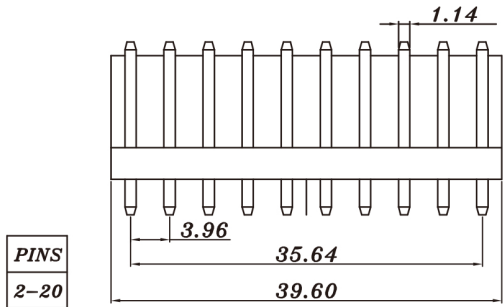




D531WW

Wafer Right Angle

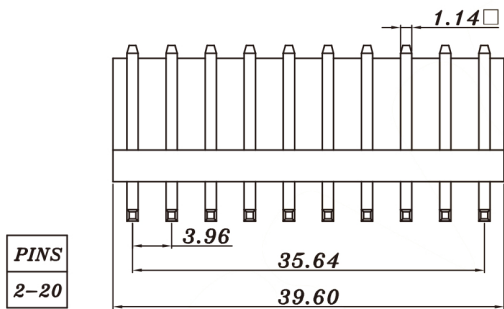





D531WH

Housing

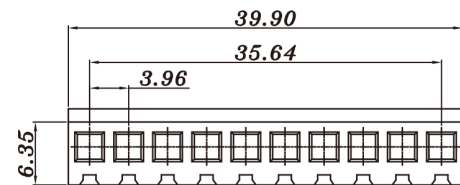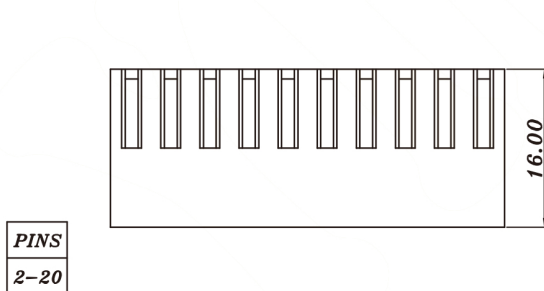

D531WT

Terminal



Contact Plated	Unit
Tin	Per Reel