


Pitch:3.96mm Disconnectable Crimp Type For PCB&Wire



MATERIAL
 Insulator:Thermoplastics
 UL94V-0 or UL94V-2
 Contact:Copper Alloy
 Contact Plated:Tin or Gold over Nickel

SPECIFICATIONS
 Voltage Rating:250V AC,DC
 Current Rating:5A AC,DC
 Withstanding Voltage:1000V AC/minute
 Contact Resistance:10mΩ Max.
 Insulation Resistance:500MΩ Min.
 Temperature Range:-25°C~+85°C

Series No.



Pins




Mounting Type



S: Straight Type
 R: Right Angle

Contact Plated



T: Tin





Packing Code



1. Bulk pack in bag
2. Tube
3. Tube+Cap
4. Tape & Reel+Cap





D532VW

Wafer Straight Type

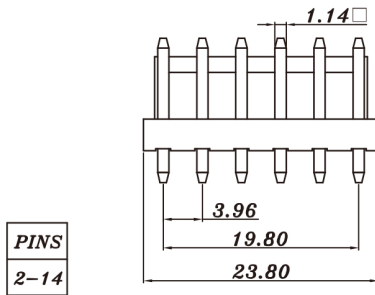




D532VW

Wafer Right Angle

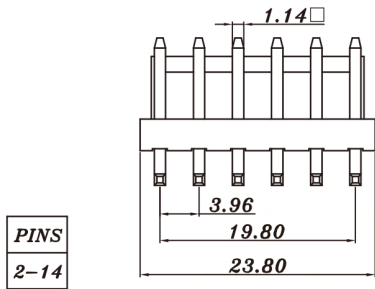

D532VH

Housing

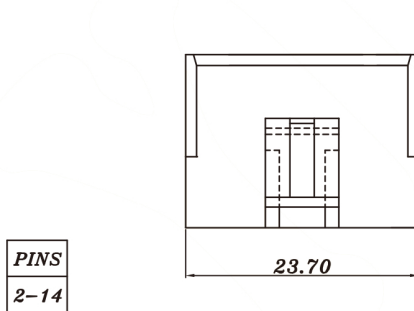

D532VT

Terminal

