


Pitch:4.2mm Disconnectable Crimp Type For PCB&Wire



MATERIAL
 Insulator: Thermoplastics
 UL94V-0 or UL94V-2
 Contact: Copper Alloy
 Contact Plated: Tin or Gold over Nickel

SPECIFICATIONS
 Voltage Rating: 600V AC, DC
 Current Rating: 9A AC, DC
 Withstanding Voltage: 1500V AC/minute
 Contact Resistance: 10mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Temperature Range: -25°C ~ +85°C

Series No. Pins Mounting Type Contact Plated Packing Code


S S T

S: Straight Type R: Right Angle T: Tin

1. Bulk pack in bag
 2. Tube
 3. Tube+Cap
 4. Tape & Reel+Cap


D576MWA/576MWAA

Wafer Straight Type

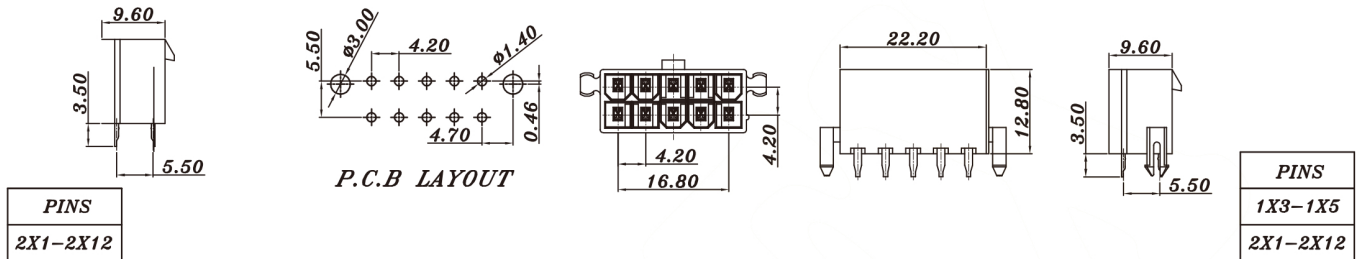


D576MW

Wafer Straight Type/Right Angle

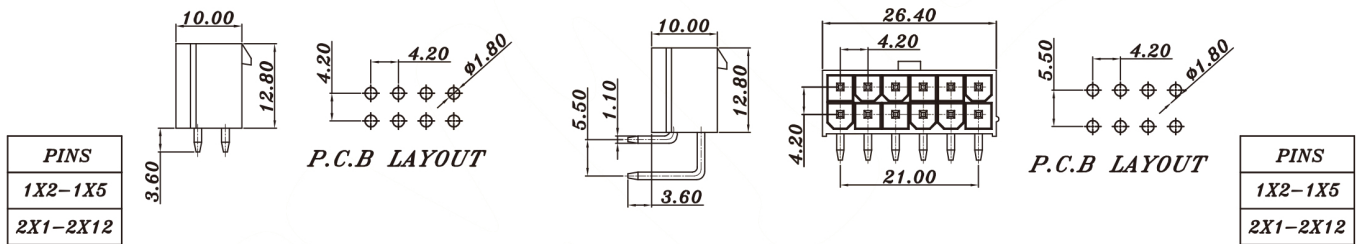

D576FH/576FT

Housing/Terminal

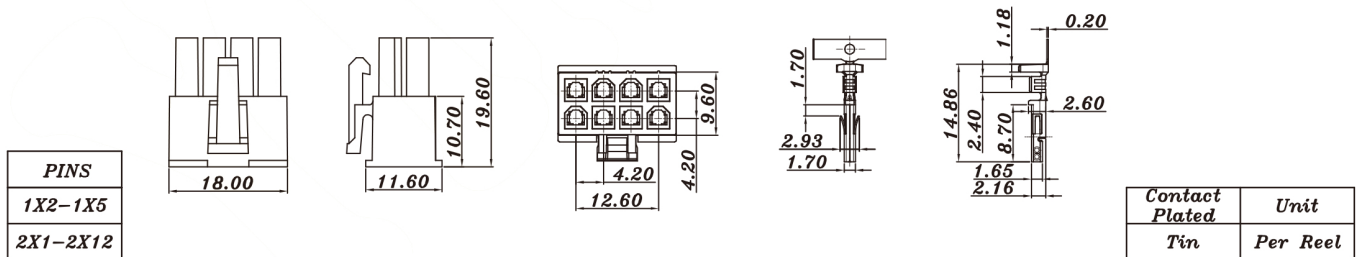

D576MH/576MT

Housing/Terminal

