

STANDARD / SPECIFICATION

Frequency Range : 868~928MHz

Impedance : 50Ω

VSWR : ≤ 2.0

Return Loss : ≤ -10 dB

Radiation : Omni-directional

Gain (Peak Gain) : 3 dBi

Polarization : Linear polarization

Connector : SMA Plug /SMA Plug reverse

Dimensions : 207±1mm

Operating Temperature : -40°C ~ +80°C


Storage Temperature : -45°C ~ +85°C

Material : Plastic

Antenna Cover/ Antenna Base : PBT, PC, TPE



Return Loss

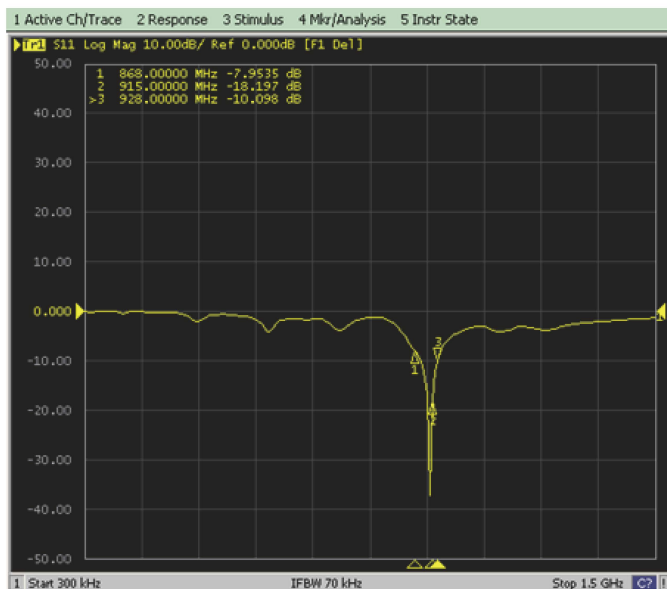

VSWR

