

STANDARD / SPECIFICATION

Frequency Range : 915 MHz

Impedance : 50Ω

VSWR : ≤ 2.0

Return Loss : ≤ -10 dB

Radiation : Omni-directional

Gain (Peak Gain) : 2 dBi


Polarization : Linear polarization

Dimensions : $\Phi 4.5\text{mm} \times \Phi 0.5(\text{Line})$ or Customization available


Operating Temperature : $-40^{\circ}\text{C} \sim +80^{\circ}\text{C}$

Storage Temperature : $-45^{\circ}\text{C} \sim +85^{\circ}\text{C}$

Material : Phosphor bronze

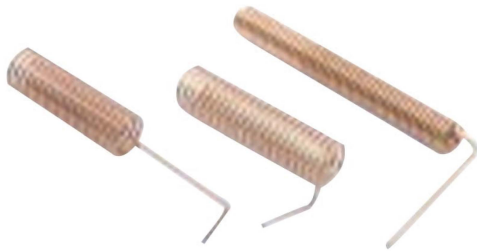

Return Loss

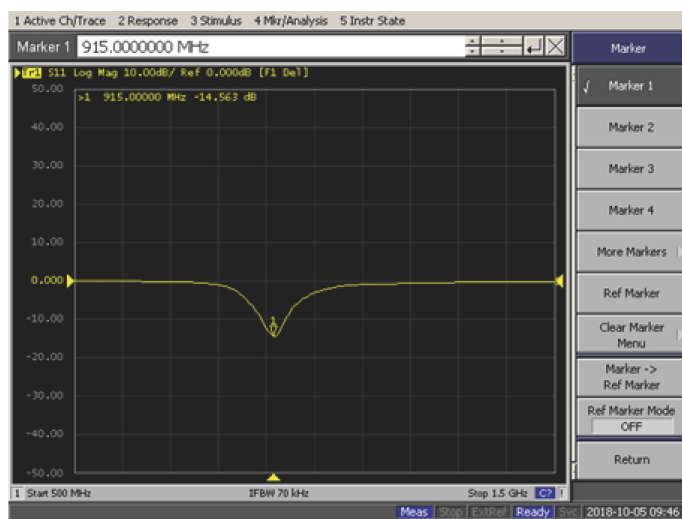

VSWR

