



STANDARD / SPECIFICATION

Frequency Range : 433 MHz

Impedance : 50Ω

VSWR : ≤ 2.0

Return Loss : ≤ -10 dB

Radiation : Omni-directional

Gain (Peak Gain) : 2 dBi

Polarization : Linear polarization

Diameter : SMA Plug / SMA Plug reverse


Operating Temperature : $-40^{\circ}\text{C} \sim +80^{\circ}\text{C}$

Storage Temperature : $-45^{\circ}\text{C} \sim +85^{\circ}\text{C}$

Material : Plastic

Antenna Cover/ Antenna Base : PBT,PC,TPE

Return Loss

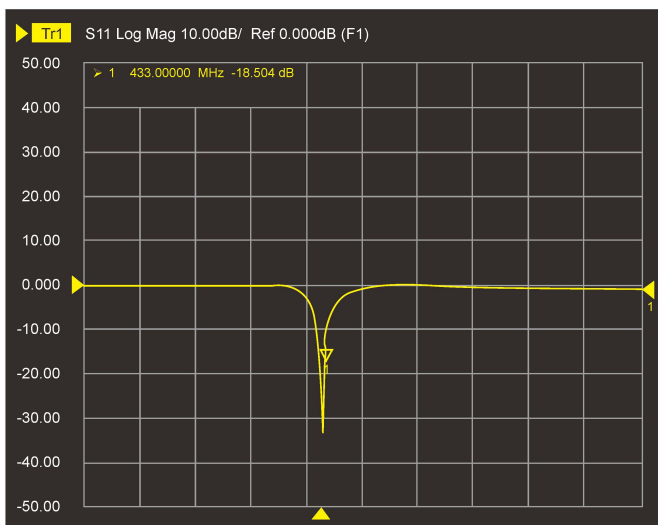

VSWR

