



STANDARD / SPECIFICATION

Frequency Range : 1575.42 ±3MHz

Impedance : 50Ω

VSWR : ≤2.0

Return Loss : ≤ -10 dB

Antenna Gain(Peak High) : 3 dBi

LNA Gain(Peak High) : 28dB Typ.

Polarization : RHCP

Horizontal Angle of Coverage : 90°

Noise Figure : 1.5 dB Typ.

Voltage : 3V to 5V


Cable Type : RG174/Customization available

Connector : SMA/MCX/MMCX/Customization

Waterproof Level : IPX4

Dimensions : 45.7*38.4*13mm

Return Loss

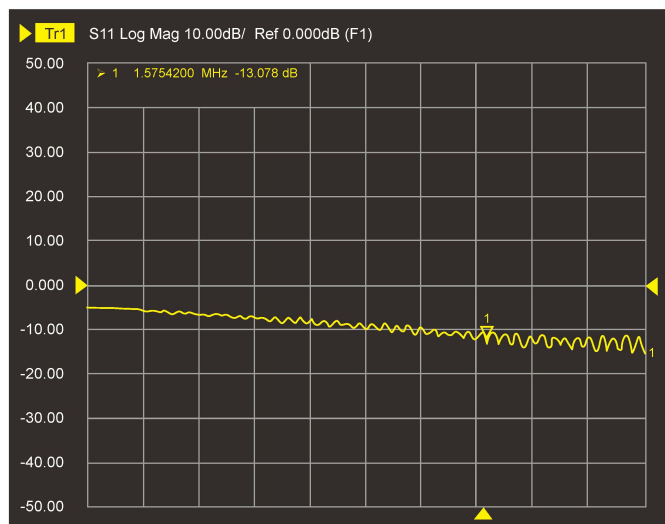

VSWR

