

STANDARD / SPECIFICATION

Frequency Range : 1575.42 ± 1.023MHz

Impedance : 50Ω

VSWR : ≤ 2.0

Return Loss : ≤ -10 dB

Antenna Gain(Peak High) : 1.5 dBi

LNA Gain(Peak High) : 17dB min 19dB Typ.

Polarization : RHCP

Horizontal Angle of Coverage : 90°

Noise Figure : 1.4 dB Typ. 1.5dB Max.

Voltage : Min:2.7V Typ:3.0V Max:3.3V

Cable Type : OD1.13 Black/White/Gray or Customization

Connector : SMA/MCX/MMCX/U.HF/I-PEX/Customization available


Waterproof Level : none

Antenna Dimensions : Ceramic cover: 12*12*4mm

Total Dimensions: 12*12*6mm



Return Loss

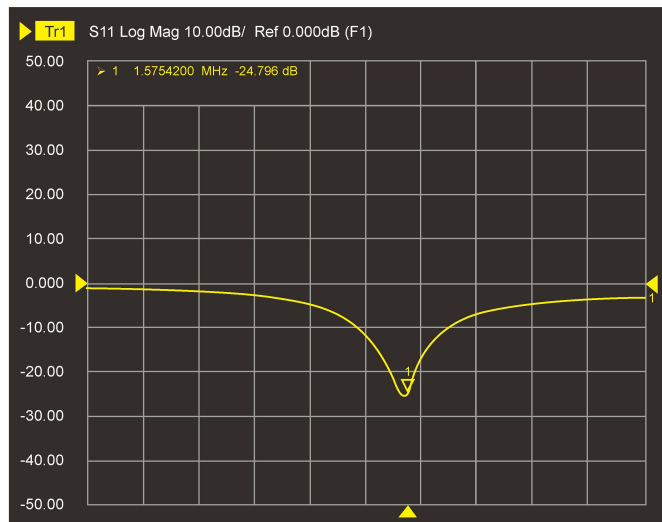

VSWR

