



STANDARD / SPECIFICATION

Frequency Range : 470~870MHz

Impedance : 50Ω/ 75Ω

VSWR : ≤ 2.0

Return Loss : ≤ -10 dB

Radiation : Omni-directional

Gain (Peak Gain) : 2 dBi

Polarization : Linear polarization

Connector : SMA Plug / F Type / Customization available

Dimensions : 146±5mm

Operating Temperature : -40°C ~ +80°C

Storage Temperature : -45°C ~ +85°C


Material : Plastic, Metal

Antenna Cover/ Antenna Base : PBT, PC

Cable Type : RG174/5C2V/3C2V/RG178/Customization

Cable Length : Customization

Return Loss

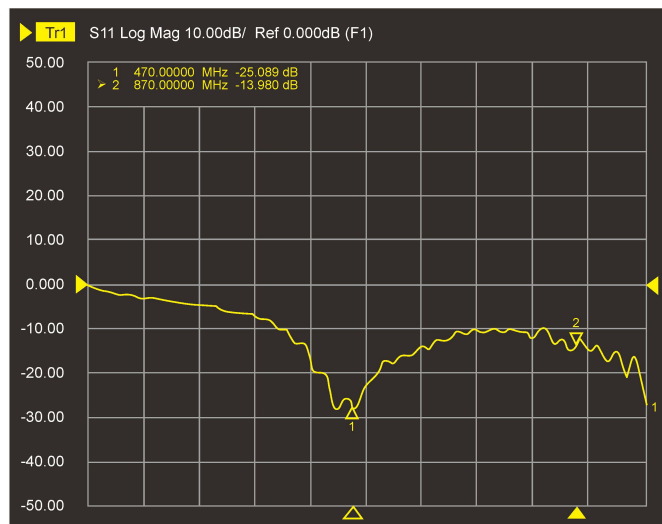

VSWR

